

About **Reximex**

Reximex was founded in Konya-Beyşehir in 2015. Our main goal is to produce world class products using the latest R&D and Manufacturing proficiency, with the guidance of our dynamic Management and Production team.

Reximex achieved a customer portfolio over 60 countries in a very short time with the vision of never compromise philosophy from quality, innovation and customer satisfaction.

We Have A Wide Product Range!

We always aim to respond to the expectations of our customers at the highest level. At the same time, we are always working on launching new products by following the global end-user trends very carefully.

We design customizable products!

We analyze our customers' conditions & area of use and personal preferences; and we design products that exceeds our customers' expectations. We reveal easily customizable products that maximizes the end-user experience.

We always bring our manufacturing skills to next level and keep up with the latest technologies!

Reximex production plant uses modern & latest technology equipment in an integrated production facility of 12.000 square meters. Our Production Facility & Crew is continuously developing and expanding in accordance with our customers' needs and our future business plans.



PANGEA

BOLT ACTION RIFLE



.300 Win Mag. (Soon) 7 mm Rem Mag. (Soon) Completly, compatible with after market pre-fit Remington 700 Barrels



Microcell Recoil Pad Lead to Incredibly Light and Soft Recoil Pad



Three-lug Locking with 60-degree Bolt Throw



Picatinny Rail Mounted on Receiver



5/8"X24 Muzzle Thread Optional



Bolt Release Button



Firing Pin Indicator



T-REX Trigger Systems
Fully Adjustable Pull Weight of 2 - 4 lbs



Compatible with Rem 700 LA magazine variations

PANGEA

BOLT ACTION RIFLE





Scan code for all options and colors

Barrel Length	20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread)	Bolt		Three-lug Locking with 60-degree Bolt Throw
Barrel Contour	17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted)	Safety		Trigger Safety
Twist Rate	1:10 (4 grooves) (1:12 on Match Barrels)	Trigger		Fully adjustable pull weight of 2 - 4 lbs
Magazine	Floorplate 3+1	Sight		Picatinny Rail Mounted on receiver
Magazine Compatib	Rem 700 LA Box Mag. Variations.	Accuracy	3-Shot Sub-N	loa Guaranteed at 100 Yards with Premium Factory Ammunition
Overall Length	40.41"	Stock		Selected Turkish Walnut, Oil Finished
Average Weight	7.80 lbs	Stock Cor	npatibility	Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN



PANGEA

BOLT ACTION RIFLE



.243 Win

6.5 Creedmoor

.308 Win

.270 Win .30-06 SpringField

300 Win Mag. (Soon) 7 mm Rem Mag. (Soon)

Completly, compatible with after market pre-fit Remington 700 Barrels

Barrel Length	20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread)	Bolt	Three-lug Locking with 60-degree Bolt Throw
Barrel Contour	17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted)	Safety	Trigger Safety
Twist Rate	1:10 (4 grooves) (1:12 on Match Barrels)	Trigger	Fully adjustable pull weight of 2 - 4 lbs
Magazine	Floorplate 3+1	Sight	Picatinny Rail Mounted on receiver
Magazine Compatibili	Rem 700 LA Box Mag. Variations.	Accuracy	acy 3-Shot Sub-Moa Guaranteed at 100 Yards with Premium Factory Ammunition
Overall Length	40.15"	Stock	Selected Turkish Walnut, Oil Finished
Average Weight	8.25 lbs	Stock Cor	Compatibility Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN







5/8"X24 Muzzle Thread (Optional)



PANGEA HUNTER

BOLT ACTION RIFLE



AVAILABLE CALIBERS

.243 Win

6.5 Creedmoor

.308 Win

.270 Win

30-06 SpringField

.300 Win Mag. (Soon)

7 mm Rem Mag. (Soon)

Completly, compatible with after market pre-fit Remington 700 Barrels

Barrel Length	20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread)	Bolt	Three-lug Locking with 60-degree Bolt Thro
Barrel Contour	17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted)	Safety	Trigger Safet
Twist Rate	1:10 (4 grooves)	Trigger	Fully adjustable pull weight of 2 - 4 lb
Magazine	Floorplate 3+1	Sight	Picatinny Rail Mounted on receiv
Magazine Compatibili	ty Rem 700 LA Box Mag. Variations.	Accuracy	cy 3-Shot Sub-Moa Guaranteed at 100 Yards with Premium Factory Ammunition
Overall Length	from 44" to 45" (w/24" Barrel)	Stock	Polymer Stock with 3 Spacer for LOP and Adjustable Cheek Ris
Average Weight	7.00 lbs	Stock Cor	ompatibility Rem 700 LA variations on Magpul – GRS – MDT - McMILLA



3 Spacers for length of pull adjustment. (0.2", 0.35" and 0.55" width). Stock Length of pull can be extended from 13.25"



Adjustable Cheek Riser




Remington 700 Long Action Foot prints means compatible with All Long Action after market stocks and trigger systems.





Scan code for all options and colors





CALIBER



BARREL LENGTH 113 mm / 4.45 "



MAG. CAPACITY 15 Round Steel Magazine



SYSTEM Semi Auto Striker-Fired



WEIGHT without magazine 696 g / 24.55 oz



WEIGHT with empty magazine 776 g / 27.34 oz

BEYOND THE SAFETY STANDARDS



TRIGGER SAFETY



STRIKER STATUS INDICATOR



LOADED CHAMBER INDICATOR



TRX 9 pistol is designed and produced with stricter safety systems to prevent unintentional discharge should the pistol be dropped or misused. Trigger Safety, Firing Pin Block, Striker Status Indicator & Loaded Chamber Indicator provides the ultimate shooting pleasure for everyone with the safety in mind.



REVERSIBLE MAGAZINE CATCH

ADVANCED TEXTURE

Progressive design texture of TRX9 pistol provides smooth touch and firm grip during handling and shooting.

2 BACKSTRAP SIZES

TRX9 comes with 2 modular backstraps in medium and large sizes for different trigger distances.

Backstraps are made of elastomer polymer and together with the special design surface texture on them, you have a much comfortable and softer feel in your palm.



MIL-STD 1913 PICATINNY RAIL

Slide incorporates a Mil-Std 1913 Picatinny Rail for suitable sighting devices-such as laser sights- or flashlights.

FAST FIELD STRIPPING

Field stripping the TRX9 is toolless and can be done in a few seconds at the touch of a button and simply by lifting up the slide. Take down button locks back when the slide is installed back into the chassis.

OPTICS-READY SLIDE

Steel slide is equipped with metal rear and front sight installed. Red Dot Sights or other compatible optic sights can easily be installed on the Optic Mount Slot on the slide.

Compatible with "Trijicon RMRcc and Shield RMS/RMSc"



DOUBLE STACK METAL MAGAZINE

Metal construction and custom design magazines are made for long durability and severe endurance.

2 magazines in 15 round capacity (double stack) are included.







AMBIDEXTROUS

TRX9 is equipped with an ambidextrous slide stop and reversible magazine release. Ambidextrous grip is made of advanced polymer and designed to fit perfectly to both right- and left-hand shooters.


CUSTOM DESIGN POLYMER HANDGUN CASE





TECHNICAL SPECIFICATIONS

Firing System	Semi-Auto Striker-Fired	
Caliber	9x19mm	
Туре	Compact Size	
Magazine Capacity	15 round - Steel Magazine	
Slide	Oxidation Proof -Chromium, Nickel, Molybdenum Forged Steel	
Lower Frame	Advanced Polymer	
Barrel	Oxidation Proof -Chromium, Nickel, Molybdenum Steel Barrel	
Barrel Length	107.95mm / 4.25"	
Rate of Twist	1:10 w/6 grooves	
Sights	Metal Rear and Front Sight 3 White Dots Optic Mount Slot for Red Dot Sights (1.61" length)	
• Weight without magazine	696 gram /24.55 ounces	
Weight w/empty magazine	776 gr / 27.34 ounces	
• Features	Reversible Magazine Catch Mag-Well MIL-STD-1913 Picatinny Rail Modular Backstraps (M and L sizes) Ambidextrous Slide Release	
Safety Systems	Trigger Safety Firing Pin Block Loaded Chamber Indicator (LCI) Striker Status Indicator	



LENGTH (OVERALL) 7.56"	SLIDE LENGTH 7.29"	WIDTH (OVERALL) 1.18"
SLIDE WIDTH 1.03"	6 HEIGHT INC. MAG. 5.22"	6 TRIGGER DISTANCE 2.73"
	LINE OF SIGHT 6.30"	

Color Options





TRX9 C18






TRX9 C18



Scan code for all options and colors

TECHNICAL SPECIFICATIONS

System	Single Action Trigger, Striker-Fired Semi-Auto
Caliber	9x19mm
• Type	Full Size
Magazine Capacity	18 round - Steel Magazine
• Slide	Oxidation Proof -Chromium, Nickel, Molybdenum Steel
Lower Frame	Advanced Polymer
Barrel	Oxidation Proof -Chromium, Nickel, Molybdenum Steel Drilled Barrel
Barrel Length	125mm / 4.92"
• Rate of Twist	1:10 w/6 grooves
• Sights	Metal Rear and Front Sight 3 White Dots Optic Mount Slot for Red Dot Sights (1.61" length)
Weight without magazine	727 gram /25.64 oz
• Weight w/empty magazine	807 gr / 28.46 oz
• Features	Reversible Magazine Catch Mag-Well MIL-STD-1913 Picatinny Rail Modular Backstraps (M and L sizes) Ambidextrous Slide Release
Safety Systems	Trigger Safety Firing Pin Block Loaded Chamber Indicator (LCI) Striker Status Indicator

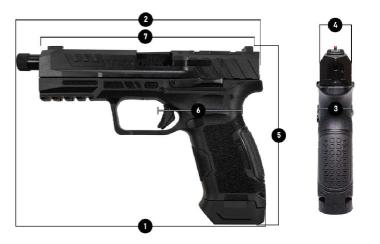

LENGTH (OVERALL) 208.4 mm / 8.20"	2 SLIDE LENGTH 185.35 mm / 7.29"	3 WIDTH (OVERALL) 30.20 mm / 1.18"
SLIDE WIDTH 26.20 mm / 1.03"	5 HEIGHT INC. MAG. 150.7 mm / 5.93"	TRIGGER DISTANCE 69.50 mm / 2.73"
	UINE OF SIGHT	



TRX9 C18



SNIPER GRAY & GOLD EDITION





FDE













RS 512



Model	RS 512
System	Gas operated semi auto w/rotating bolt head locking
Gauge	12Ga
Chamber	76mm
Available Barrel Lenghts	66cm / 71cm / 76 and 81cm
Receiver	Anodized Aluminium
Magazine Capacity	5+1/7+1/9+1
Stock	Synthetic - Rubber Inlay Anti-Slip Textured
Trigger Guard	Techno Polymer

Recoil Pad	Microcell Recoil Pad
Weight (w/71cm Barrel)	3,1kg
Total Lenght(w/71cm Barrel)	125cm
Safety	Cross-Bolt Trigger Safety
Sight	Front Fiber Optic
Choke	90mm REX Chokes C/IC/M/IM/F
Shim Kit	5 Shims for Adjusment of Drop and Cast







Scan code for all options and colors

RS 212



Model	RS 212
System	Gas Operated Semi Auto
Gauge	12Ga
Chamber	76mm
Available Barrel Lenghts	66cm/71cm/76cm/ and 81cm
Receiver	Aluminium
Magazine Capacity	5+1/7+1/9+1
Stock	Synthetic - Anti Slip Textured
Trigger Guard	Techno Polymer

Recoil Pad	High Density PU Material
Weight (w/71cm Barrel)	3,15kg
Total Lenght (w/71cm Barrel)	123cm
Safety	Cross-Bolt Trigger Safety
Sight	Front Fiber Optic
Choke	70mm REX Chokes C/IC/M/IM/F
Shim Kit	5 Shims for Adjusment of Drop and Cast





Scan code for all options and colors



RS 512 HD

9 9 9 9

Shims

The receiver made from 7075 aluminum and aliminum cover make for a lightweight design.

Receiver

Consistent Shooting Experience

Advanced Recoil Absorber System reduces the recoil for consistent shooting experience (*available on Synthetic version).



QD Socket

QD socket for quick disconnection system

5pcs unique shims for adjustment of drop and cast provides personalized

Recoil Pad

The design and the innovative material of Microcell recoil pad lead to incredibly light and soft recoil pad.



Anti-Slip Textured Rubber Inlay Synthetic stock for better handling



Better Handling

Bolt with carburized rotating bolt head is locked into the barrel



Model	RS 512 HD
System	Gas operated semi auto w/rotating bolt head locking
Gauge	12Ga
Chamber	76mm
Available Barrel Lenghts	51cm
Receiver	Anodized Aluminum
Magazine Capacity	7+1
Stock	Synthetic - Rubber Inlay Anti-Slip Textured

Trigger Guard	Techno Polymer
Recoil Pad	Microcell Recoil Pad
Weight	3,1kg
Total Lenght	105cm
Safety	Cross-Bolt Trigger Safety
Sight	Tactical Rear & Front Sight
Choke	Choked Barrel





RS 512 HD BLACK

Faster Loading

Oversized trigger guard suits for use in all conditions and redesigned for faster loading





RS 512 HD SNIPER GREY







Scan code for all options and colors



TACTICAL & HOME DEFENCE



Scan code for all options and colors



RS 212 HD FDE



System	Semi-Auto
Gauge	12Ga
Chamber	76mm
Available Barrel Lenghts	51cm
Receiver	Anodized Aluminium
Magazine Capacity	7+1
Stock	Synthetic - Anti-Slip Textured
Trigger Guard	Techno Polymer

Recoil Pad	High Density PU Material
Weight	2.6kg
Total Lenght	99.8 cm
Safety	Cross-Bolt Trigger Safety
Sight	Tactical Rear & Front Sight
Shim Kit	5 Shims for Adjusment of Drop and Cast







System	Pump Action
Gauge	12Ga
Chamber	76mm
Available Barrel Lenghts	51cm
Receiver	Anodized Aluminium
Magazine Capacity	7+1
Stock	Synthetic - Anti-Slip Textured

Recoil Pad	High Density PU Material
Weight	2.6kg
Total Lenght	99.8 cm
Safety	Cross-Bolt Trigger Safety
Sight	Rear & Front Sight
Shim Kit	5 Shims for Adjusment of Drop and Cast
Trigger Guard	Techno Polymer

PCP AIRGUNS





ACCURA CARBON



Model		Accura Carbon		
Cocking Sys	tem	Side Lever		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle	e Velocity	274m/s (900fps)	259m/s (850fps)	224m/s (800fps)
Energy(*)	Joules	20.6	39.6	49.1
Lifergy(*)	ft.lbs	15.18	29.1	36.1
Magazine Capacity		14	12	10
Number of Shots at Optimal Velocity (250-100bar) 110 90 75		75		
Air Tube Volume		480cc Carbon Bottle		
Fill Pressure		250 BAR		
Regulator Included		Included , 28CC Pr	e-Chamber	

Stock	High Quality Synthetic Stock w/Adjustable Cheek Piece (Shown on Picture)		
	Other Option : Turkish Walnut Stock w/Adjustable Cheek Piece		
Overall Length	1010mm (39.7")		
Barrel Length	420mm (16.5")		
Weight	Synthetic: 3.5kg (7.7lbs) / Turkish Walnut: 3.1kg (6.8lbs)		

- * Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included



Anti-Slip Textured TechnoPolymer

Anti-Slip textured handgrip and forearm designed for better handling.

DAYSTAR W Carbine



Model		Daystar W Carbine		
Cocking Sys	tem	Side Lever		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle	e Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy(*)	Joules	33.6	49.3	55.2
Lileigy()	ft.lbs	24.8	36.3	40.7
Magazine Ca	apacity	14	12	10
Number of S Optimal Velo	Shots at ocity (250-100bar)	60	50	45
Air Tube Volume		260cc		
Fill Pressure		250 BAR		

Stock	Turkish Walnut Stock w/Adjustable Cheek Piece (Shown on Picture) Other Option: High Quality Synthetic Stock w/Adjustable Cheek Piece
Overall Length	890mm (35")
Barrel Length	420mm (16.5")
Weight	Synthetic: 2.4 Kg (5.2lbs) / Turkish Walnut: 2.8 Kg (6.1lbs)
Regulator	Included

- * Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Data may vary on products with optional regulator.
- * Scope is not included

NYX COMPACT CARBON



Model		NYX Compact Carbon		
Cocking Sys	tem	Side Lever		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle	e Velocity	308m/s (1000fps)	274m/s (900fps)	243 m/s (800fps)
Energy(*)	Joules ft.lbs	25.4 18.7	44.3 32.6	48.9 36.09
Magazine Ca	apacity	14	12	10
Number of S Optimal Velo	Shots at ocity (250-100bar)	90 75 75		75
Air Tube Vol	ume	480cc Carbon Bottle		
Fill Pressure		250 BAR		

Stock	Tactical Telescopic Stock Adjustable Cheek Piece.
Overall Length	820 mm / 32.2"
Barrel Length	380 mm / 14.96"
Weight	3.5 kg (7.70 lbs)
Regulator	Included

 $^{^{\}star}$ Velocity figures are tested with 8.44 grain 177cal- 18.13 grain 22cal and 25.39 grain 25cal JSB pellets

^{*} Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Model		LIEVA		
Cocking Sys	tem	Lever Action		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25 LIEVA Number
Max. Muzzle	e Velocity	274,3 m/s / 900 fps	228,6 m/s 750 fps	198,1 m/s 650 fps
Energy(*)	Joules	20,64	30,80	32,39
Lileigy()	ft.lbs	15,18	22,65	23,82
Magazine Ca	apacity	14	12	10
Number of S Optimal Velo	Shots at ocity (250-100bar)	60	40	40
Air Tube Volume		105cc		
Fill Pressure		250 BAR		

Stock	Turkish Walnut
Overall Length	980 mm / 38.58 "
Barrel Length	520 mm / 20.4"
Weight	2.2 kg (4.85 lbs)
Regulator	Included

 $^{^*}$ Velocity figures are tested with 8.44 grain 177 cal - 18.13 grain 22 cal and 25.39 grain 25 cal JBS pellets.

^{*}Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

LYRA-BP



Model	LYRA BP			Fill Pressure	200 Bar
Cocking System	Side Lever			Stock	Turkish Walnut
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	Overal Length	625mm (24.6")
Max Muzzle Velocity (*)	305m/s (1000fps)	275m/s (900fps)	244m/s (800fps)	Barrel Length	420mm (16,5")
Energy (*)	31.6 Joule/ 23.3 ft.lbs	50.8 Joule/ 37.5 ft.lbs	55.4 Joule/ 40.7 ft.lbs	Weight	Weight 3.1 kg (6.8 lbs)
Magazine Capacity	14	12	10	* Velocity figures are tested with 8.44grain 177cal- 18.13grain	
Number of Shots	60	45	35	22cal and JSB pellets*Velocity/Energy results may due to	o pellet weight, pellet shape,
Air Tube Volume	210cc			temperature, elevation, as well as o	

TORMENTA LITE SERIES



TORMENTA LITE



Turkish Walnut Stock

Model	Tormenta Lite	
Cocking System	Side Lever	
Caliber	4.5mm / .177 , 5.5mm / .22 , 6.35mm / .25 290 m/s / 950 fps , 259 m/s 900 fps , 243 m/s 800 fps	
Max.Muzzle Velocity(*)		
Energy (*) Joules	22.99 / 44.34 / 49.08	
ft.lbs	16.91 / 32.61 / 36.09	
Magazine Capacity	14 , 12 , 10	

Number Of Shots At Optimal Velocity(200-100 Bar)	75, 65, 65
Air Tube Volume	130cc
Fill Pressure	200 Bar
Stock	Adjustable AR Compatible Telescopic Adjustable Stock
Overall Length	850 mm / 33.4 "
Barrel Length	380 mm / 14.9 "
Weight	2.8 kg / 6.17 lbs
Regulator	Optional




Model Morpho		Morpho	
Powerplant		CO2	
Action		Side Lever	
Caliber		4.5mm / .177cal	5.5mm / .22cal
Ammo		Pellet	
Muzzle Veloc	ity (*)	400 fps / 121.9 m/s	350 fps / 106.6 m/s
Energy(*)	Joules	4.07	4.93
Lifergy()	ft.lbs	2.99	6.70
Magazine Capacity		14	12
Number Of Shot with 1x 12 gr CO2		40	36

Power Source	1x 12 gr CO2
Barrel & Barrel Length	Rifled / 201mm (7.9")
Overall Length with Detachable Stock	612mm (24.09")
Weight with Detachable Stock	1.3 kg (2.9lbs)
Overall Length with Pistol Grip	370mm (14.5")
Weight with Pistol Grip	0.9 kg (1.98lbs)

 $^{^{\}star}$ Velocity figures are tested with 8.44 grain 177cal- 18.13 grain 22cal and 25.39 grain 25cal JSB pellets

^{*} Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

RP / RPA SILVER

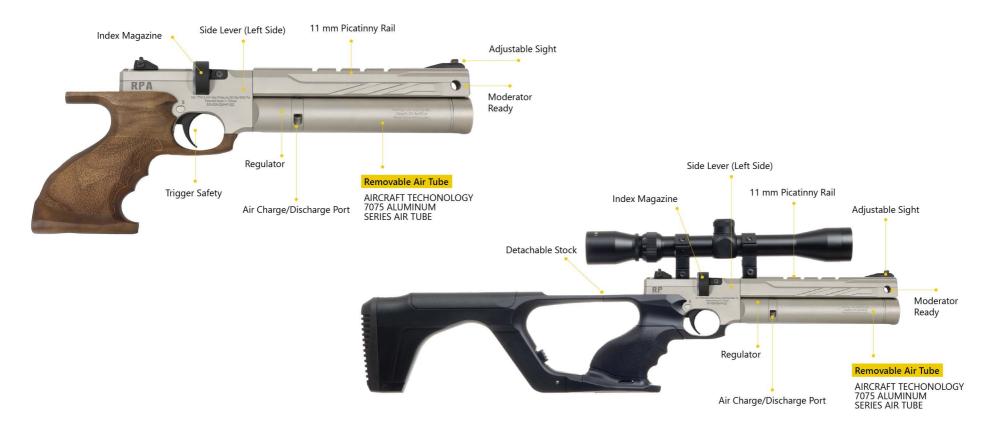

Model	RPA SILVER	
Cocking System	SIDE LEVER	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Maximum Muzzle Velocity	186m/s (610fps)	157m/s (515fps)
Energy	9.5 Joule / 7 ft.lbs	14.5 Joule / 10.7 ft.lbs
Magazine Capacity	9	7
Number of Shots At Optimal Velocity (250-110 Bar)	55	40
Air Tube Volume	50cc Aluminium (Removable)	
Fill Pressure	250 Bar	
Stock	Turkish Walnut / Optio	onal Laminated Grip

Overal Length	330 mm (13")	
Barrel Length	200 mm (7.9")	
Weight	900 grams (1.98 lbs)	
Regulator	Standard	

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

RP 11



Model		RP 11	
Cocking Syst	tem	Side Lever	
Caliber		4.5mm / .177cal	5.5mm / .22cal
Max. Muzzle	Velocity	186 m/s (610fps)	157m/s (515fps)
Energy(*)	Joules ft.lbs	9.5 7	14.5 10.7
Magazine Ca	pacity	9	7
Number of S Optimal Velo	hots at ocity (250-100bar)	55	40
Air Tube Vol	ume	50cc Aluminium (removable)	
Fill Pressure		250 BAR	

Grip	Aluminum 1911 Pistol Grip
Overall Length	330mm (13")
Barrel Length	200mm (7.9")
Weight	1005 gram (2.21 lbs)
Regulator	Included

^{*} Velocity figures are tested with 8.44grain 177ca and 18.13grain 22cal and 25.39 grain 25cal JSB pellets

^{*} Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

^{*} Scope is not included

RP RACE

RPA RACE



Cocking Sys	tem	Side Lever	
Caliber		4.5mm / .177cal	5.5mm / .22cal
Max. Muzzle	e Velocity	186 m/s (610fps)	157m/s (515fps)
Energy(*)	Joules	9.5	14.5
Lifergy()	ft.lbs	7	10.7
Magazine Ca	apacity	9	7
Number of S Optimal Velo	Shots at ocity (250-100bar)	55	40
Air Tube Vol	ume	50cc Aluminium (removable)	
Fill Pressure		250 BAR	

 $^{^{\}star}$ Velocity figures are tested with 8.44 grain 177ca and 18.13 grain 22cal and 25.39 grain 25cal JSB pellets

Grip	Synthetic & Walnut Stock
Overall Length	330mm (13")
Barrel Length	200mm (7.9")
Weight	900 grams (1.98 lbs)
Regulator	Included



Sporting Cocking Lever



New Tactical Trigger



New Optics-ready Plate (Compatible with "Trijicon RMRcc and Shield RMS/RMSc"

^{*} Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

^{*} Scope is not included

META LITE SERIES





Model	META PLUS LITE		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	225	155	160
Air Tube Volume	515cc (425cc Aluminum	n Bottle + 90cc Pre-Char	mber)
Fill Pressure	250 Bar		
Stock	Bullpup Design , Syntl	hetic Stock	

Overal Length	780 mm (23.4")
Barrel Length	480 mm (18.8")
Weight	7.87 lbs & 3.1 kg
Regulator	Included

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

Model	META LITE		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	125	85	80
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design , Syntl	netic Stock	

Overal Length	750 mm (29.5")
Barrel Length	480 mm (18.8")
Weight	7.87 lbs & 3.1 kg
Regulator	Included

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



META Premium



Model	META PREMIUM		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	335.2m/s (1100fps)	304m/s (1000fps)	274m/s (900fps)
Energy	30.7 Joule / 22.6 ft.lbs	54.2 Joule / 40.2 ft.lbs	61.9 Joule / 45.6 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	210	150	120
Air Tube Volume	570cc (480cc Carbon B	ottle + 90cc Pre-Chamb	er)
Fill Pressure	250 Bar		
Stock	Bullpup Design, High C 3-Axis Adjustable Butt	Quality Aluminium Stock Pad with Monopod	

NEW Meta Lite in synthetic stock is now available

Overal Length	1000 mm (39.3")
Barrel Length	700 mm (27.5")
Weight	4.2 kg (8.6 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



reximex

Meta Premium FDE

700mm long expert barrel provides more precise accuracy and tighter grouping at long range with slug ammo.





META Plus



Model	META PLUS		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	225	155	160
Air Tube Volume	515cc (425cc Aluminun	n Bottle + 90cc Pre-Char	mber)
Fill Pressure	250 Bar		
Stock	Bullpup Design, High Quality Aluminium Stock 3-Axis Adjustable Butt Pad with Monopod		

NEW Meta Lite in synthetic stock is now available

Overal Length	780 mm (23.4")
Barrel Length	480 mm (18.8")
Weight	3.9 kg (8.6 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.









META



Model	MEIA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	125	85	80
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design, High C	Quality Aluminium Stock	

3-Axis Adjustable Butt Pad with Monopod

NEW Meta Lite in synthetic stock is now available

Overal Length	750 mm (29.5")
Barrel Length	480 mm (18.8")
Weight	3.6 kg (7.9 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.











Upgraded Hammer Tension Adjustment Wheel & System Pre-Chamber

Upgraded Regulator Adjustment Wheel & New Valve System

Easy Change Air Tube (Switch Without De-Gassing)



Model	THRONE GEN2		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	310m/s (1010fps)	275m/s (935fps)	250m/s (830fps)
Energy	26 Joule / 19 ft.lbs	47.7 Joule / 35.2 ft.lbs	52.6 Joule / 38.8 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	165	110	80
Air Tube Volume	425cc Aluminium (Opti	ional 480cc Carbon Fiber	Air Tank + 18cc Pre-Chambe
Fill Pressure	250 Bar		
Stock	Adjustable Butt Pad Hi	gh Quality Synthetic Stoo	ck and Grip

Overal Length	850 mm (33.5")
Barrel Length	580 mm (22.8")
Weight	3.5 kg (7.7 lbs)
Regulator	Externally Adjustable

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.







Throne Gen2 Desert Sand Carbon Bottle



Throne Gen2 Skull Camo



Throne Gen2 61 Camo



Scan code for all options and colors



Throne Gen2 Compact



Model	THRONE GEN2 COMPA	ACT	
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	281m/s (925fps)	243m/s (800fps)	216m/s (745fps)
Energy	21.7 Joule / 16 ft.lbs	34.9 Joule / 25.8 ft.lbs	42.4 Joule / 31.3 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	75	65	55
Air Tube Volume	300cc Carbon Bottle (1	8cc Pre-Chamber)	
Fill Pressure	250 Bar		
Stock	Adjustable Butt Pad Hi	gh Quality Synthetic Sto	ck and Grip

Overal Length	700 mm (27.5")
Barrel Length	420 mm (16.5")
Weight	3.3 kg (7.3 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.









Model	RP	
Cocking System	SIDE LEVER	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Maximum Muzzle Velocity	186m/s (610fps)	157m/s (515fps)
Energy	9.5 Joule / 7 ft.lbs	14.5 Joule / 10.7 ft.lbs
Magazine Capacity	9	7
Number of Shots At Optimal Velocity (250-110 Bar)	55	40
Air Tube Volume	50cc Aluminium (Removable)	
Fill Pressure	250 Bar	
Stock	Removable High Quality Synthetic Stock	

Overal Length	330 mm (13")
Barrel Length	200 mm (7.9")
Weight	900 grams (1.98 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.





Model	RPA	
Cocking System	SIDE LEVER	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Maximum Muzzle Velocity	186m/s (610fps)	157m/s (515fps)
Energy	9.5 Joule / 7 ft.lbs	14.5 Joule / 10.7 ft.lbs
Magazine Capacity	9	7
Number of Shots At Optimal Velocity (250-110 Bar)	55	40
Air Tube Volume	50cc Aluminium (Removable)	
Fill Pressure	250 Bar	
Stock	Turkish Walnut / Optional Laminated Grip	

Overal Length	330 mm (13")
Barrel Length	200 mm (7.9")
Weight	900 grams (1.98 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



NYX





AR-15 Grip

Scan code for all options and colors





Optional 700cc Carbon Bottle

Number of Shots with 700cc Carbon Bottle at Optimal Velocity 250 Bar - 110 Bar, 4.5mm: 195 Shot, 5.5mm: 165 Shot, 6.35mm 210 Shot

Model	NYX		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	308m/s (1000fps)	274m/s (900fps)	243m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	44.3 Joule / 32.6 ft.lbs	48.9 Joule / 36.09 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	200	130	100
Air Tube Volume	500cc / Optional 700cc Carbon Bottle		
Fill Pressure	250 Bar		
Stock	Tactical Telescopic Stock Elevation Adjustable Cheek Rest.		

Overal Length	1050 mm (41.3")
Barrel Length	480 mm (18.8")
Weight	4.415 kg (9.813 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.







Model	ZONE		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	304m/s (1000fps)	270m/s (935fps)	255m/s (850fps)
Energy	25.4 Joule / 18.7 ft.lbs	47.7 Joule / 35.2 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	75	65	55
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design High Q	uality Synthetic Stock, A	djustable Butt Pad

Overal Length	900 mm (35.4")
Barrel Length	580 mm (22.8")
Weight	3.3 kg (7.27 lbs)
Regulator	Standard

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

ZONE W





Model	ZONE W		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	304m/s (1000fps)	270m/s (935fps)	255m/s (850fps)
Energy	25.4 Joule / 18.7 ft.lbs	47.7 Joule / 35.2 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	75	65	55
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Turkish Walnut		

Overal Length	900 mm (35.4")	
Barrel Length	580 mm (22.8")	
Weight	3.3 kg (7.27 lbs)	
Regulator	Standard	

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



Model	APEX		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	340m/s (1110fps)	270m/s (880fps)	255m/s (830fps)
Energy	31.3 Joule / 23.1 ft.lbs	42.3 Joule / 31.2 ft.lbs	53.9 Joule / 39.8 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	112	96	80
Air Tube Volume	310cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design High Q	uality Synthetic Stock Ad	djustable Butt Pad

Overal Length	850 mm (33.4")
Barrel Length	480 mm (18.9")
Weight	3 kg (6.6 lbs)
Regulator	Optional

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- *Data may vary on products with optional regulator.
- * Scope is not included.









Adjustable Butt Pad

ACCURA



Model	ACCURA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	168	144	120
Air Tube Volume	425cc		
Fill Pressure	250 Bar		
Stock	High Quality Synthetic Adjustable Butt Pad	Stock Turkish Walnut Ac	ljustable Cheek Piece

Overal Length	1010 mm (39.7")
Barrel Length	380 mm (14.9")
Weight	Synthetic: 3.5 kg (7.7lbs)

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

ACCURA W





Model	ACCURA W		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	168	144	120
Air Tube Volume	425cc		
Fill Pressure	250 Bar		
Stock	Turkish Walnut Stock ,	Adjustable Cheek Piece	


& Manual Safety

Overal Length	1010 mm (39.7")
Barrel Length	380 mm (14.9")
Weight	Wood: 3.1kg (6.8lbs)

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



TORMENTA

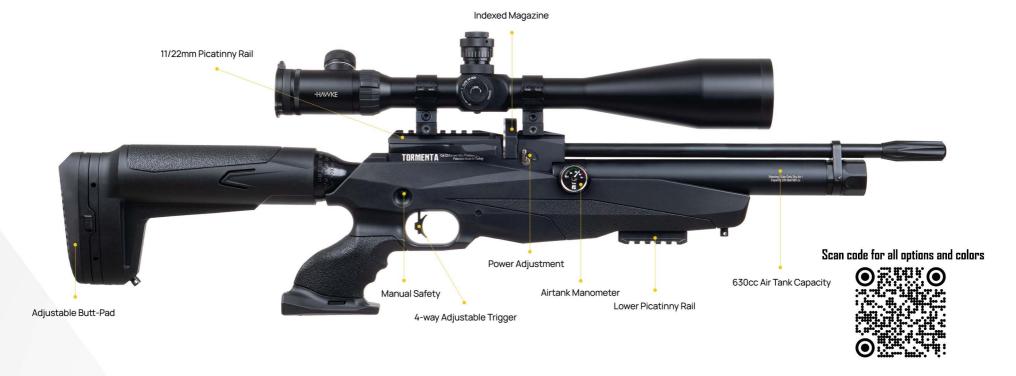

Model	TORMENTA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1090fps)	270m/s (880fps)	255m/s (840fps)
Energy	30.2 Joule / 22.3 ft.lbs	42.3 Joule / 31.2 ft.lbs	53.9 Joule / 39.76 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	126	108	90
Air Tube Volume	380cc (250 cc Rear Bottle + 130 cc Front Cylinder)		ler)
Fill Pressure	250 Bar		
Stock	High Quality Synthetic Stock Adjustable Butt Pad		

Overal Length	850 mm (33.4")	
Barrel Length	380 mm (14.9")	
Weight	2.8 kg (6.17 lbs)	

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

TORMENTA W



Turkish Walnut Stock



Tormenta Color Options



Tormenta Ambush



Tormenta Thunder White



Tormenta Red Fire



Scan code for all options and colors



Model	DAYSTAR			
Cocking System	SIDE LEVER			
Caliber	4.5mm / .177cal	5.5mm / .22cal	2cal 6.35mm / .25cal	
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)	
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs	
Magazine Capacity	14	12	10	
Number of Shots At Optimal Velocity (250-110 Bar)	98	84	70	
Air Tube Volume	260cc			
Fill Pressure	250 Bar			
Stock	High Quality Synthetic	Stock, Adjustable Cheek	Piece, Adjustable Butt Pad	

Overal Length	1050 mm (41.3")
Barrel Length	580 mm (22.8")
Weight	Synthetic: 2.8 kg (6.1lbs)
Regulator	Optional

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- *Data may vary on products with optional regulator.
- * Scope is not included.

DAYSTAR W





Scan code for all options and colors



DAYSTAR W Blue Laminated

Model	DAYSTAR W		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	98	84	70
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Turkish Walnut Stock, A	Adjustable Cheek Piece, (Optional Laminated Stocks

Overal Length	1050 mm (41.3")
Barrel Length	580 mm (22.8")
Weight	Wood: 3.2kg (7lbs)
Regulator	Optional

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- *Data may vary on products with optional regulator.
- * Scope is not included.



LYRA



Rubber Butt Pad



Scan code for all options and colors







Sound Moderators & Fitted Muzzle Cap

Model	LYRA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1115fps)	290m/s (965fps)	260m/s (850fps)
Energy	31.6 Joule / 23.3 ft.lbs	50.8 Joule / 37.5 ft.lbs	55.4 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	110	75	65
Air Tube Volume	280cc		
Fill Pressure	200 Bar		
Stock	Turkish Walnut		

Overal Length	1070 mm (41.3")		
Barrel Length	580 mm (22.8")		
Weight	3.45 kg (7.6 lbs)		

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



LYRA-K





Cocking System			Side Lever	Fill Pressure	250 Bar
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	Stock	Turkish Walnut
Max Muzzle Velocity (*)	305m/s (1000fps)	275m/s (900fps)	244m/s (800fps)	Overal Length	880mm (34,6")
Energy (*)	31.6 Joule/ 23.3 ft.lbs	50.8 Joule/ 37.5 ft.lbs	55.4 Joule/ 40.7 ft.lbs	Barrel Length	380mm (14.9")
Magazine Capacity	14	12	10	Weight	2.8 kg (6.1 lbs)
Number of Shots At Optima	ıl Velocity (200-100Bar)		100, 70, 60		
Air Tube Volume	-		250cc		



Reximex ABS Cases



Reximex Filling Equipments









Reximex Air Rifle Sound Moderators





Accessories



