



reximex

Aim for the next level

About Reximex

Reximex was founded in Konya-Beyşehir in 2015. Our main goal is to produce world class products using the latest R&D and Manufacturing proficiency, with the guidance of our dynamic Management and Production team.

Reximex achieved a customer portfolio over 60 countries in a very short time with the vision of never compromise philosophy from quality, innovation and customer satisfaction.

We Have A Wide Product Range!

We always aim to respond to the expectations of our customers at the highest level. At the same time, we are always working on launching new products by following the global end-user trends very carefully.

We design customizable products!

We analyze our customers' conditions & area of use and personal preferences; and we design products that exceeds our customers' expectations. We reveal easily customizable products that maximizes the end-user experience.

We always bring our manufacturing skills to next level and keep up with the latest technologies!

Reximex production plant uses modern & latest technology equipment in an integrated production facility of 12.000 square meters. Our Production Facility & Crew is continuously developing and expanding in accordance with our customers' needs and our future business plans.



NEW

www.reximex.com

RIFLE / PANGEA

PANGEA

BOLT ACTION RIFLE



Pangea Classic LW22

AVAILABLE CALIBERS

🎯 .243 Win 🎯 6.5 Creedmoor 🎯 .308 Win 🎯 .270 Win 🎯 .30-06 Springfield

🎯 .300 Win Mag. (Soon) 🎯 7 mm Rem Mag. (Soon)

Completely, compatible with after market pre-fit Remington 700 Barrels



Microcell Recoil Pad Lead to Incredibly Light and Soft recoil Pad



Three-lug Locking with 60-degree Bolt Throw



Picatinny Rail Mounted on Receiver



5/8"X24 Muzzle Thread Optional



Bolt Release Button



Firing Pin Indicator



T-REX Trigger Systems Fully Adjustable Pull Weight of 2 - 4 lbs



Compatible with Rem 700 LA magazine variations

PANGEA

BOLT ACTION RIFLE

NEW

www.reximex.com

RIFLE / PANGEA



Pangea Classic LW22



Scan code for all options and colors

Barrel Length	20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread)
Barrel Contour	17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted)
Twist Rate	1:10 (4 grooves) (1:12 on Match Barrels)
Magazine	Floorplate 3+1
Magazine Compatibility	Rem 700 LA Box Mag. Variations.
Overall Length	40.41"
Average Weight	7.80 lbs

Bolt	Three-lug Locking with 60-degree Bolt Throw
Safety	Trigger Safety
Trigger	Fully adjustable pull weight of 2 - 4 lbs
Sight	Picatinny Rail Mounted on receiver
Accuracy	3-Shot Sub-Moa Guaranteed at 100 Yards with Premium Factory Ammunition
Stock	Selected Turkish Walnut, Oil Finished
Stock Compatibility	Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN

NEW



Scan code for all options and colors

PANGEA

BOLT ACTION RIFLE



Pangea Modern SW20 w/Fluted Barrel

AVAILABLE CALIBERS

🎯 .243 Win 🎯 6.5 Creedmoor 🎯 .308 Win 🎯 .270 Win 🎯 .30-06 Springfield
🎯 .300 Win Mag. (Soon) 🎯 7 mm Rem Mag. (Soon)

Completely, compatible with after market pre-fit Remington 700 Barrels

Barrel Length	20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread)	Bolt	Three-lug Locking with 60-degree Bolt Throw
Barrel Contour	17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted)	Safety	Trigger Safety
Twist Rate	1:10 (4 grooves) (1:12 on Match Barrels)	Trigger	Fully adjustable pull weight of 2 - 4 lbs
Magazine	Floorplate 3+1	Sight	Picatinny Rail Mounted on receiver
Magazine Compatibility	Rem 700 LA Box Mag. Variations.	Accuracy	3-Shot Sub-Moa Guaranteed at 100 Yards with Premium Factory Ammunition
Overall Length	40.15"	Stock	Selected Turkish Walnut, Oil Finished
Average Weight	8.25 lbs	Stock Compatibility	Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN



Fluted Barrel (Optional)



5/8"X24 Muzzle Thread (Optional)

www.reximex.com

RIFLE / PANGEA



Scan code for all options and colors

PANGEA HUNTER

BOLT ACTION RIFLE



Pangea Hunter LW22

AVAILABLE CALIBERS


- .243 Win
- 6.5 Creedmoor
- .308 Win
- .270 Win
- .30-06 Springfield
- .300 Win Mag. (Soon)
- 7 mm Rem Mag. (Soon)

Completely, compatible with after market pre-fit Remington 700 Barrels

Barrel Length	20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread)	Bolt	Three-lug Locking with 60-degree Bolt Throw
Barrel Contour	17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted)	Safety	Trigger Safety
Twist Rate	1:10 (4 grooves)	Trigger	Fully adjustable pull weight of 2 - 4 lbs
Magazine	Floorplate 3+1	Sight	Picatinny Rail Mounted on receiver
Magazine Compatibility	Rem 700 LA Box Mag. Variations.	Accuracy	3-Shot Sub-Moa Guaranteed at 100 Yards with Premium Factory Ammunition
Overall Length	from 44" to 45" (w/24" Barrel)	Stock	Polymer Stock with 3 Spacer for LOP and Adjustable Cheek Riser
Average Weight	7.00 lbs	Stock Compatibility	Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN



3 Spacers for length of pull adjustment. (0.2", 0.35" and 0.55" width). Stock Length of pull can be extended from 13.25"



Adjustable Cheek Riser



Remington 700 Long Action Foot prints means compatible with All Long Action after market stocks and trigger systems.

NEW

www.reximex.com

HANDGUN / TRX9



Scan code for all options and colors

TRX9

SEMI AUTOMATIC PISTOL



CALIBER
9X19 mm



BARREL LENGTH
113 mm / 4.45 "



MAG. CAPACITY
15 Round
Steel Magazine



SYSTEM
Semi Auto
Striker-Fired



WEIGHT
without magazine
696 g / 24.55 oz



WEIGHT
with empty magazine
776 g / 27.34 oz

BEYOND THE SAFETY STANDARDS



TRIGGER SAFETY



STRIKER STATUS INDICATOR



LOADED CHAMBER INDICATOR

TRX9

TRX 9 pistol is designed and produced with stricter safety systems to prevent unintentional discharge should the pistol be dropped or misused. Trigger Safety, Firing Pin Block, Striker Status Indicator & Loaded Chamber Indicator provides the ultimate shooting pleasure for everyone with the safety in mind.

NEW

www.reximex.com

HANDGUN / TRX9

NEW

www.reximex.com

HANDGUN / TRX9



OVERSIZE TRIGGER GUARD

TRX9 features an oversized trigger guard for use with gloved hands.

TEXTURED INDEXING POINTS

Indexing points on the TRX 9 are textured for an extra-firm grip and more ergonomic handling.

MAGWELL

Every TRX9 comes with custom design Magwell making change of magazines much smoother, faster and easier.

REVERSIBLE MAGAZINE CATCH

ADVANCED TEXTURE

Progressive design texture of TRX9 pistol provides smooth touch and firm grip during handling and shooting.

2 BACKSTRAP SIZES

TRX9 comes with 2 modular backstraps in medium and large sizes for different trigger distances.

Backstraps are made of elastomer polymer and together with the special design surface texture on them, you have a much comfortable and softer feel in your palm.

NEW

www.reximex.com

HANDGUN / TRX9



MIL-STD 1913 PICATINNY RAIL

Slide incorporates a Mil-Std 1913 Picatinny Rail for suitable sighting devices-such as laser sights- or flashlights.

FAST FIELD STRIPPING

Field stripping the TRX9 is toolless and can be done in a few seconds at the touch of a button and simply by lifting up the slide. Take down button locks back when the slide is installed back into the chassis.

OPTICS-READY SLIDE

Steel slide is equipped with metal rear and front sight installed. Red Dot Sights or other compatible optic sights can easily be installed on the Optic Mount Slot on the slide.

Compatible with " Trijicon RMRcc and Shield RMS/RMSc "



NEW

www.reximex.com

HANDGUN / TRX9

DOUBLE STACK METAL MAGAZINE

Metal construction and custom design magazines are made for long durability and severe endurance.

2 magazines in 15 round capacity (double stack) are included.



AGGRESSIVE SERRATIONS FOR EASIER MANIPULATION



AMBIDEXTROUS HOLSTER FOR BOTH RIGHT AND LEFT HAND USERS.
SIDE CLIP CAN EASILY BE REVERSED FOR LEFT HAND USERS.



UNIQUE DESIGN HOLSTER



AMBIDEXTROUS

TRX9 is equipped with an ambidextrous slide stop and reversible magazine release. Ambidextrous grip is made of advanced polymer and designed to fit perfectly to both right- and left-hand shooters.

CUSTOM DESIGN POLYMER HANDGUN CASE





TECHNICAL SPECIFICATIONS

• Firing System	Semi-Auto Striker-Fired
• Caliber	9x19mm
• Type	Compact Size
• Magazine Capacity	15 round - Steel Magazine
• Slide	Oxidation Proof -Chromium, Nickel, Molybdenum Forged Steel
• Lower Frame	Advanced Polymer
• Barrel	Oxidation Proof -Chromium, Nickel, Molybdenum Steel Barrel
• Barrel Length	107.95mm / 4.25"
• Rate of Twist	1:10 w/6 grooves
• Sights	Metal Rear and Front Sight 3 White Dots Optic Mount Slot for Red Dot Sights (1.61" length)
• Weight without magazine	696 gram /24.55 ounces
• Weight w/empty magazine	776 gr / 27.34 ounces
• Features	Reversible Magazine Catch Mag-Well MIL-STD-1913 Picatinny Rail Modular Backstraps (M and L sizes) Ambidextrous Slide Release
• Safety Systems	Trigger Safety Firing Pin Block Loaded Chamber Indicator (LCI) Striker Status Indicator



1 LENGTH (OVERALL) 7.56"	2 SLIDE LENGTH 7.29"	3 WIDTH (OVERALL) 1.18"
4 SLIDE WIDTH 1.03"	5 HEIGHT INC. MAG. 5.22"	6 TRIGGER DISTANCE 2.73"
	7 LINE OF SIGHT 6.30"	

NEW

www.reximex.com

HANDGUN / TRX9

TRX9

Color Options



DuoTone
Tungsten



DuoTone
Midnight Bronze



DuoTone
OD Green



DuoTone
Desert Sand



Sniper Gray



Magpul FDE



Black

TRX9

TRX9 C18



Pistol Compensator



18 Round Extended Magazine



5/8"X24 Muzzle Thread

NEW

www.reximex.com

HANDGUN / TRX9

NEW

www.reximex.com

HANDGUN / TRX9

TRX9


TRX9 C18



Scan code for all options and colors

TECHNICAL SPECIFICATIONS

• System	Single Action Trigger, Striker-Fired Semi-Auto
• Caliber	9x19mm
• Type	Full Size
• Magazine Capacity	18 round - Steel Magazine
• Slide	Oxidation Proof -Chromium, Nickel, Molybdenum Steel
• Lower Frame	Advanced Polymer
• Barrel	Oxidation Proof -Chromium, Nickel, Molybdenum Steel Drilled Barrel
• Barrel Length	125mm / 4.92"
• Rate of Twist	1:10 w/6 grooves
• Sights	Metal Rear and Front Sight 3 White Dots Optic Mount Slot for Red Dot Sights (1.61" length)
• Weight without magazine	727 gram /25.64 oz
• Weight w/empty magazine	807 gr / 28.46 oz
• Features	Reversible Magazine Catch Mag-Well MIL-STD-1913 Picatinny Rail Modular Backstraps (M and L sizes) Ambidextrous Slide Release
• Safety Systems	Trigger Safety Firing Pin Block Loaded Chamber Indicator (LCI) Striker Status Indicator

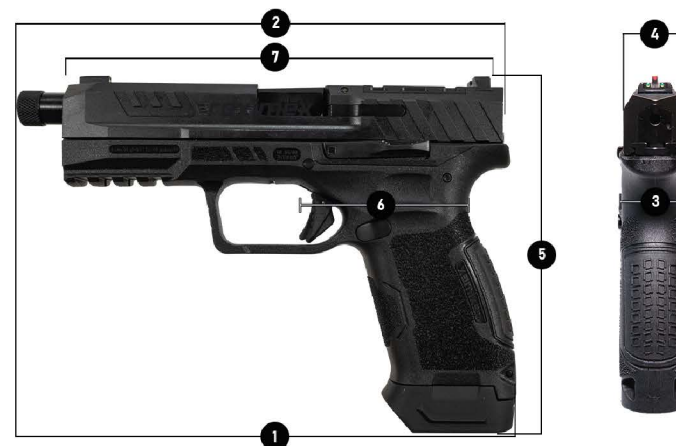

1
LENGTH (OVERALL)
208.4 mm / 8.20"

2
SLIDE LENGTH
185.35 mm / 7.29"

3
WIDTH (OVERALL)
30.20 mm / 1.18"

4
SLIDE WIDTH
26.20 mm / 1.03"

5
HEIGHT INC. MAG.
150.7 mm / 5.93"

6
TRIGGER DISTANCE
69.50 mm / 2.73"

7
LINE OF SIGHT
160.20 mm / 6.30"

TRX9

TRX9 C18



SNIPER GRAY & GOLD EDITION



FDE



NEW

www.reximex.com

HANDGUN / TRX9

NEW

RS 912

www.reximex.com

OVER&UNDER SHOTGUN / RS 912



RS 912 Silver

Model	RS 912
System	Single Selective Trigger O/U w/Ejector
Gauge	12Ga
Chamber	76mm
Available Barrel Lengths	66cm/71cm and 76cm & 51cm Barrel with Slug Version
Receiver	Steel
Stock	Turkish Walnut
Weight (w/71cm Barrel)	3,3kg
Total Length(w/71cm Barrel)	115cm
Safety	Top Tang Barrel Selector and Safety



RS 912 Black



RS 912 High Rib Sporting Over/Under Shotgun

Ventilated and solid mid-rib options

DuoForm butt pad offers non-stick upper surface for faster and smoother shouldering, while the rough textured lower surface stops the gun properly and securely into place.



Scan code for all options and colors



RS 912 ELITE BLACK
GRADE # 2.5 TURKISH WALNUT STOCK
EXTENDED CHOKE



RS 912 SILVER
GRADE # 2 TURKISH WALNUT
EXTENDED CHOKE



RS 512



COREX®
Advanced Recoil Absorber System
Reduces the recoil for consistent shooting experience

Quick Detach Sling (QD)

Unique Shims for adjustment of drop and cast provides personalized aiming


The two-parts receiver made from 7075 aluminum for a lightweight design.

Bolt with carburized rotating bolt head is locked into the barrel.

Anti-Slip textured Rubber Inlay Synthetic Stock and forearm for better handling

Model	RS 512
System	Gas operated semi auto w/rotating bolt head locking
Gauge	12Ga
Chamber	76mm
Available Barrel Lengths	66cm / 71cm / 76 and 81cm
Receiver	Anodized Aluminium
Magazine Capacity	5+1 / 7+1 / 9+1
Stock	Synthetic - Rubber Inlay Anti-Slip Textured
Trigger Guard	Techno Polymer

Recoil Pad	Microcell Recoil Pad
Weight (w/71cm Barrel)	3,1kg
Total Length(w/71cm Barrel)	125cm
Safety	Cross-Bolt Trigger Safety
Sight	Front Fiber Optic
Choke	90mm REX Chokes C/IC/M/IM/F
Shim Kit	5 Shims for Adjustment of Drop and Cast

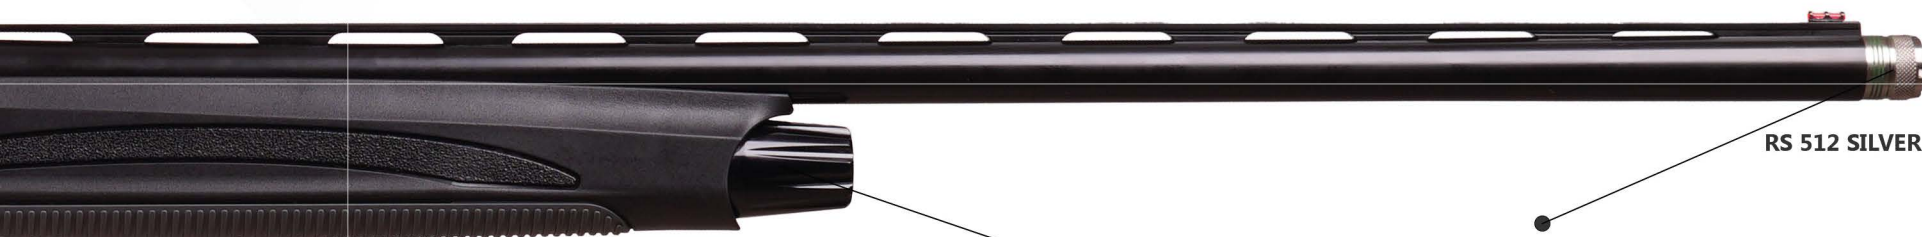

RS 512 SILVER

Quick Detach Sling (QD)

90 mm REXtra chokes for better pattern and knurled to allow for quick and easy removal or installation



RS 512 DESERT SAND



RS 512 ARMY GREEN




RS 512 WOOD



Scan code for all options and colors



RS 212

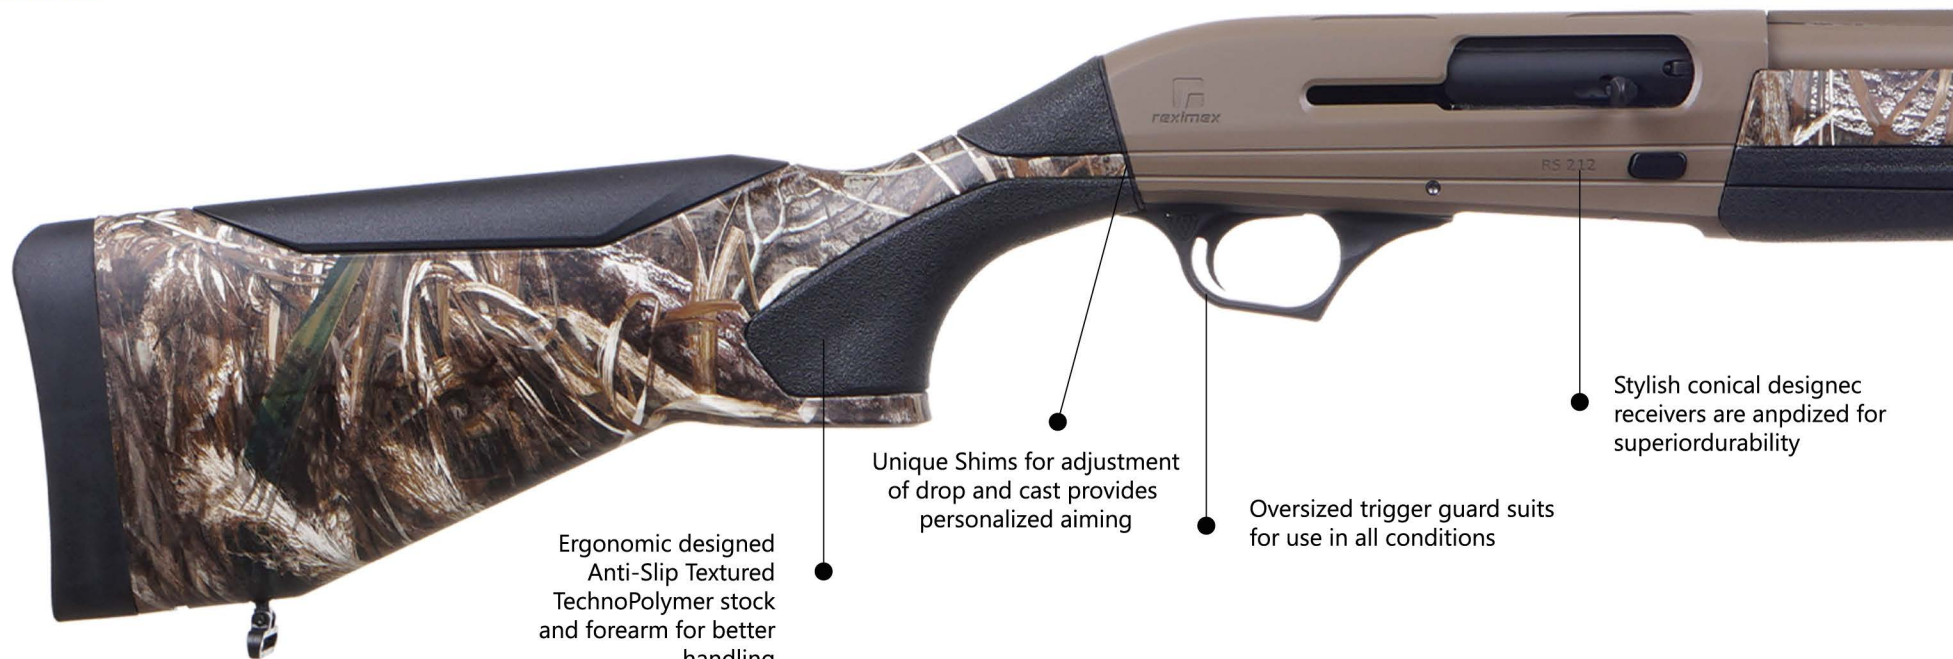

Ergonomic designed Anti-Slip Textured TechnoPolymer stock and forearm for better handling

Unique Shims for adjustment of drop and cast provides personalized aiming

Oversized trigger guard suits for use in all conditions

Stylish conical designed receivers are anodized for superior durability

Model	RS 212
System	Gas Operated Semi Auto
Gauge	12Ga
Chamber	76mm
Available Barrel Lengths	66cm/71cm/76cm/ and 81cm
Receiver	Aluminium
Magazine Capacity	5+1/7+1/9+1
Stock	Synthetic - Anti Slip Textured
Trigger Guard	Techno Polymer

Recoil Pad	High Density PU Material
Weight (w/71cm Barrel)	3,15kg
Total Length (w/71cm Barrel)	123cm
Safety	Cross-Bolt Trigger Safety
Sight	Front Fiber Optic
Choke	70mm REX Chokes C/IC/M/IM/F
Shim Kit	5 Shims for Adjustment of Drop and Cast



RS 212 FDE



RS 212 BLACK



RS 212 MAGNA



Scan code for all options and colors

Magna available with 7+1/
9+1 rounds magazine with
an oversized bolt handle &
release button.



NEW



TACTICAL & HOME DEFENCE



Scan code for all options and colors



RS 212 HD FDE



RS 212 HD

System	Semi-Auto
Gauge	12Ga
Chamber	76mm
Available Barrel Lengths	51cm
Receiver	Anodized Aluminium
Magazine Capacity	7+1
Stock	Synthetic - Anti-Slip Textured
Trigger Guard	Techno Polymer

Recoil Pad	High Density PU Material
Weight	2.6kg
Total Length	99.8 cm
Safety	Cross-Bolt Trigger Safety
Sight	Tactical Rear & Front Sight
Shim Kit	5 Shims for Adjustment of Drop and Cast

www.reximex.com

TACTICAL SHOTGUN / RS 212

NEW

www.reximex.com

TACTICAL SHOTGUN / RS 412



RS 412 HD



RS 412 GUARD



RS 412 HD SKULL

System	Pump Action
Gauge	12Ga
Chamber	76mm
Available Barrel Lengths	51cm
Receiver	Anodized Aluminium
Magazine Capacity	7 + 1
Stock	Synthetic - Anti-Slip Textured

Recoil Pad	High Density PU Material
Weight	2.6kg
Total Length	99.8 cm
Safety	Cross-Bolt Trigger Safety
Sight	Rear & Front Sight
Shim Kit	5 Shims for Adjustment of Drop and Cast
Trigger Guard	Techno Polymer

PCP AIRGUNS

PCP AIRGUNS





90cc
Pre-Chamber





LYRA-BP



Cocking System	Side Lever			Fill Pressure	200 Bar
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	Stock	Turkish Walnut
Max Muzzle Velocity (*)	305m/s (1000fps)	275m/s (900fps)	244m/s (800fps)	Overall Length	625mm (24.6")
Energy (*)	31.6 Joule/ 23.3 ft.lbs	50.8 Joule/ 37.5 ft.lbs	55.4 Joule/ 40.7 ft.lbs	Barrel Length	420mm (16,5")
Magazine Capacity	14	12	10	Weight	Weight 3.1 kg (6.8 lbs)
Number of Shots	60	45	35	* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and JSB pellets	
Air Tube Volume	210cc			*Velocity/Energy results may due to pellet weight, pellet shape	

MORPHO



Model	Morpho	
Cocking System	CO2 Airgun	
Caliber	4.5mm/.177cal	5.5mm/22cal
Max. Muzzle Velocity (*)	400 fps/121.9 m/s	350 fps/106.6 m/s
Energy (*)	4.07 Joule/ 2.99 ft.lbs	4.93 Joule/ 6,70 ft.lbs
Magazine Capacity	14	12
Shots Per Fill	40	36
Safety	Trigger Safety	
Sight	Fiber Optic Sight	

Air Tube Volume	12 gr CO2
Stock	Synthetic
Overall Length	612mm (24.09")
Barrel Length	201mm (7.9")
Weight	1.3 kg (2.9lbs)

* Velocity figures are tested with 1.44grain 177cm 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

NEW PRODUCT

CO2 PISTOL

www.reximex.com



NYX COMPACT



Model	NYX COMPACT		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	308m/s (1000fps)	274m/s (900fps)	243m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	44.3 Joule / 32.6 ft.lbs	48.9 Joule / 36.09 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	90	75	75
Air Tube Volume	425cc		
Fill Pressure	250 Bar		
Stock	Tactical Telescopic Stock Elevation Adjustable Cheek Rest.		

Overall Length	820 mm / 32.2"
Barrel Length	380 mm / 14.96"
Weight	7.70 lbs & 3.5 kg
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

LIEVA



* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

Model	LIEVA
Cocking System	Lever Action
Caliber	4.5mm / .177 , 5.5mm / .22 , 6.35mm / .25
Max.Muzzle Velocity(*)	900 fps / 274,3 m/s, 750 fps / 228,6 m/s, 650 fps / 198,1 m/s
Energy (*)	Joules
	ft.lbs
Magazine Capacity	14 , 12 , 10

Number Of Shots At Optimal Velocity(200-100 Bar)	60 / 40 / 40
Air Tube Volume	105cc
Fill Pressure	250 BAR
Stock	Turkish Walnut
Overall Length	980mm (38,58")
Barrel Length	520mm (20.4")
Weight	2.2 kg (4.85 lbs)
Regulator	Standart

RP / RPA SILVER



Model	RPA SILVER	
Cocking System	SIDE LEVER	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Maximum Muzzle Velocity	186m/s (610fps)	157m/s (515fps)
Energy	9.5 Joule / 7 ft.lbs	14.5 Joule / 10.7 ft.lbs
Magazine Capacity	9	7
Number of Shots At Optimal Velocity (250-110 Bar)	55	40
Air Tube Volume	50cc Aluminium (Removable)	
Fill Pressure	250 Bar	
Stock	Turkish Walnut / Optional Laminated Grip	

Overall Length	330 mm (13")
Barrel Length	200 mm (7.9")
Weight	900 grams (1.98 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.



TORMENTA LITE SERIES



TORMENTA LITE



TORMENTA W LITE

Turkish Walnut Stock

Model	Tormenta Lite	
Cocking System	Side Lever	
Caliber	4.5mm / .177 , 5.5mm / .22 , 6.35mm / .25	
Max.Muzzle Velocity(*)	290 m/s / 950 fps , 259 m/s 900 fps , 243 m/s 800 fps	
Energy (*)	Joules	22.99 / 44.34 / 49.08
	ft.lbs	16.91 / 32.61 / 36.09
Magazine Capacity	14 , 12 , 10	

Number Of Shots At Optimal Velocity(200-100 Bar)	75, 65, 65
Air Tube Volume	130cc
Fill Pressure	200 Bar
Stock	Adjustable AR Compatible Telescopic Adjustable Stock
Overall Length	850 mm / 33.4 "
Barrel Length	380 mm / 14.9 "
Weight	2.8 kg / 6.17 lbs
Regulator	Optional

META LITE SERIES



META PLUS LITE



META LITE

Model	META PLUS LITE		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	225	155	160
Air Tube Volume	515cc (425cc Aluminum Bottle + 90cc Pre-Chamber)		
Fill Pressure	250 Bar		
Stock	Bullpup Design, High Quality Aluminium Stock		

Overall Length	780 mm (23.4")
Barrel Length	480 mm (18.8")
Weight	7.87 lbs & 3.1 kg
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

Model	META LITE		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	125	85	80
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design, High Quality Aluminium Stock		

Overall Length	750 mm (29.5")
Barrel Length	480 mm (18.8")
Weight	7.87 lbs & 3.1 kg
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

NEW



META Premium



Scan code for all options and colors

Model	META PREMIUM		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	335.2m/s (1100fps)	304m/s (1000fps)	274m/s (900fps)
Energy	30.7 Joule / 22.6 ft.lbs	54.2 Joule / 40.2 ft.lbs	61.9 Joule / 45.6 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	210	150	120
Air Tube Volume	570cc (480cc Carbon Bottle + 90cc Pre-Chamber)		
Fill Pressure	250 Bar		
Stock	Bullpup Design, High Quality Aluminium Stock 3-Axis Adjustable Butt Pad with Monopod		

Overall Length	1000 mm (39.3")
Barrel Length	700 mm (27.5")
Weight	4.2 kg (8.6 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

NEW Meta Lite in synthetic stock is now available

www.reximex.com

PCP AIRGUNS / META PREMIUM

NEW



Meta Premium FDE

700mm long expert barrel provides more precise accuracy and tighter grouping at long range with slug ammo.



480cc Carbon Bottle

Meta Premium Desert Sand


www.reximex.com

PCP AIRGUNS / META PREMIUM

NEW



META Plus

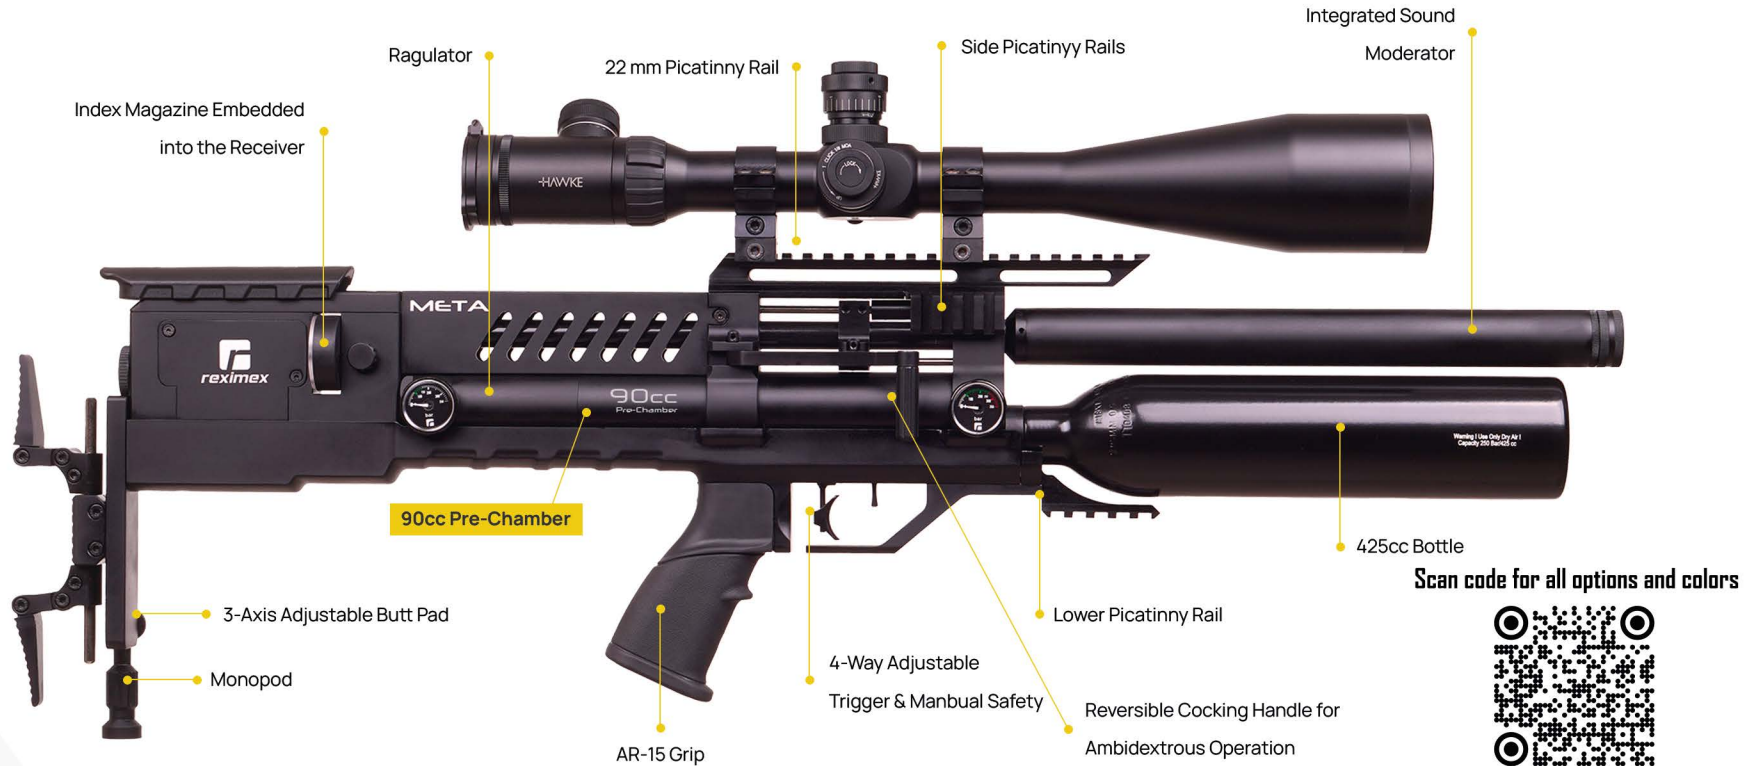

Model	META PLUS		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	225	155	160
Air Tube Volume	515cc (425cc Aluminum Bottle + 90cc Pre-Chamber)		
Fill Pressure	250 Bar		
Stock	Bullpup Design, High Quality Aluminium Stock 3-Axis Adjustable Butt Pad with Monopod		

NEW

Meta Lite in synthetic stock is now available

Overall Length	780 mm (23.4")
Barrel Length	480 mm (18.8")
Weight	3.9 kg (8.6 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

www.reximex.com

PCP AIRGUNS / META PLUS

NEW



Meta Plus FDE



330cc Carbon Bottle

Meta Plus-330cc Carbon bottle is lighter in weight.
(Number shots is about 20% less due less air volume.)

www.reximex.com

PCP AIRGUNS / META PLUS



META



Scan code for all options and colors



Model	META		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1000fps)	269m/s (880fps)	243.8m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	42.2 Joule / 31.2 ft.lbs	48.9 Joule / 36.1 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	125	85	80
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design, High Quality Aluminium Stock 3-Axis Adjustable Butt Pad with Monopod		

Overall Length	750 mm (29.5")
Barrel Length	480 mm (18.8")
Weight	3.6 kg (7.9 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

NEW Meta Lite in synthetic stock is now available



Meta Bronze



Meta OD Green



Throne Gen2



Model	THRONE GEN2		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	310m/s (1010fps)	275m/s (935fps)	250m/s (830fps)
Energy	26 Joule / 19 ft.lbs	47.7 Joule / 35.2 ft.lbs	52.6 Joule / 38.8 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	165	110	80
Air Tube Volume	425cc Aluminium (Optional 480cc Carbon Fiber Air Tank + 18cc Pre-Chamber)		
Fill Pressure	250 Bar		
Stock	Adjustable Butt Pad High Quality Synthetic Stock and Grip		

Overall Length	850 mm (33.5")
Barrel Length	580 mm (22.8")
Weight	3.5 kg (7.7 lbs)
Regulator	Externally Adjustable

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.



***Throne Gen2
Carbon Bottle***



***Throne Gen2
Desert Sand Carbon Bottle***



***Throne Gen2
Skull Camo***



***Throne Gen2
G1 Camo***



Scan code for all options and colors



Throne Gen2 Compact



Scan code for
all options and colors



Model	THRONE GEN2 COMPACT		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	281m/s (925fps)	243m/s (800fps)	216m/s (745fps)
Energy	21.7 Joule / 16 ft.lbs	34.9 Joule / 25.8 ft.lbs	42.4 Joule / 31.3 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	75	65	55
Air Tube Volume	300cc Carbon Bottle (18cc Pre-Chamber)		
Fill Pressure	250 Bar		
Stock	Adjustable Butt Pad High Quality Synthetic Stock and Grip		

Overall Length	700 mm (27.5")
Barrel Length	420 mm (16.5")
Weight	3.3 kg (7.3 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.



***Throne Gen2 Compact
Desert Sand***




***Throne Gen2 Compact
FDE***



RP



RP Slide Color Options

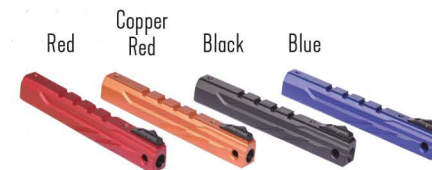

Scan code for
all options and colors



Model	RP	
Cocking System	SIDE LEVER	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Maximum Muzzle Velocity	186m/s (610fps)	157m/s (515fps)
Energy	9.5 Joule / 7 ft.lbs	14.5 Joule / 10.7 ft.lbs
Magazine Capacity	9	7
Number of Shots At Optimal Velocity (250-110 Bar)	55	40
Air Tube Volume	50cc Aluminium (Removable)	
Fill Pressure	250 Bar	
Stock	Removable High Quality Synthetic Stock	

Overall Length	330 mm (13")
Barrel Length	200 mm (7.9")
Weight	900 grams (1.98 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.



RPA




RPA
Blue
Laminated



RPA
Orange
Laminated

Scan code for
all options and colors



Model	RPA	
Cocking System	SIDE LEVER	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Maximum Muzzle Velocity	186m/s (610fps)	157m/s (515fps)
Energy	9.5 Joule / 7 ft.lbs	14.5 Joule / 10.7 ft.lbs
Magazine Capacity	9	7
Number of Shots At Optimal Velocity (250-110 Bar)	55	40
Air Tube Volume	50cc Aluminium (Removable)	
Fill Pressure	250 Bar	
Stock	Turkish Walnut / Optional Laminated Grip	

Overall Length	330 mm (13")
Barrel Length	200 mm (7.9")
Weight	900 grams (1.98 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.


* Scope is not included.




NEW



NYX

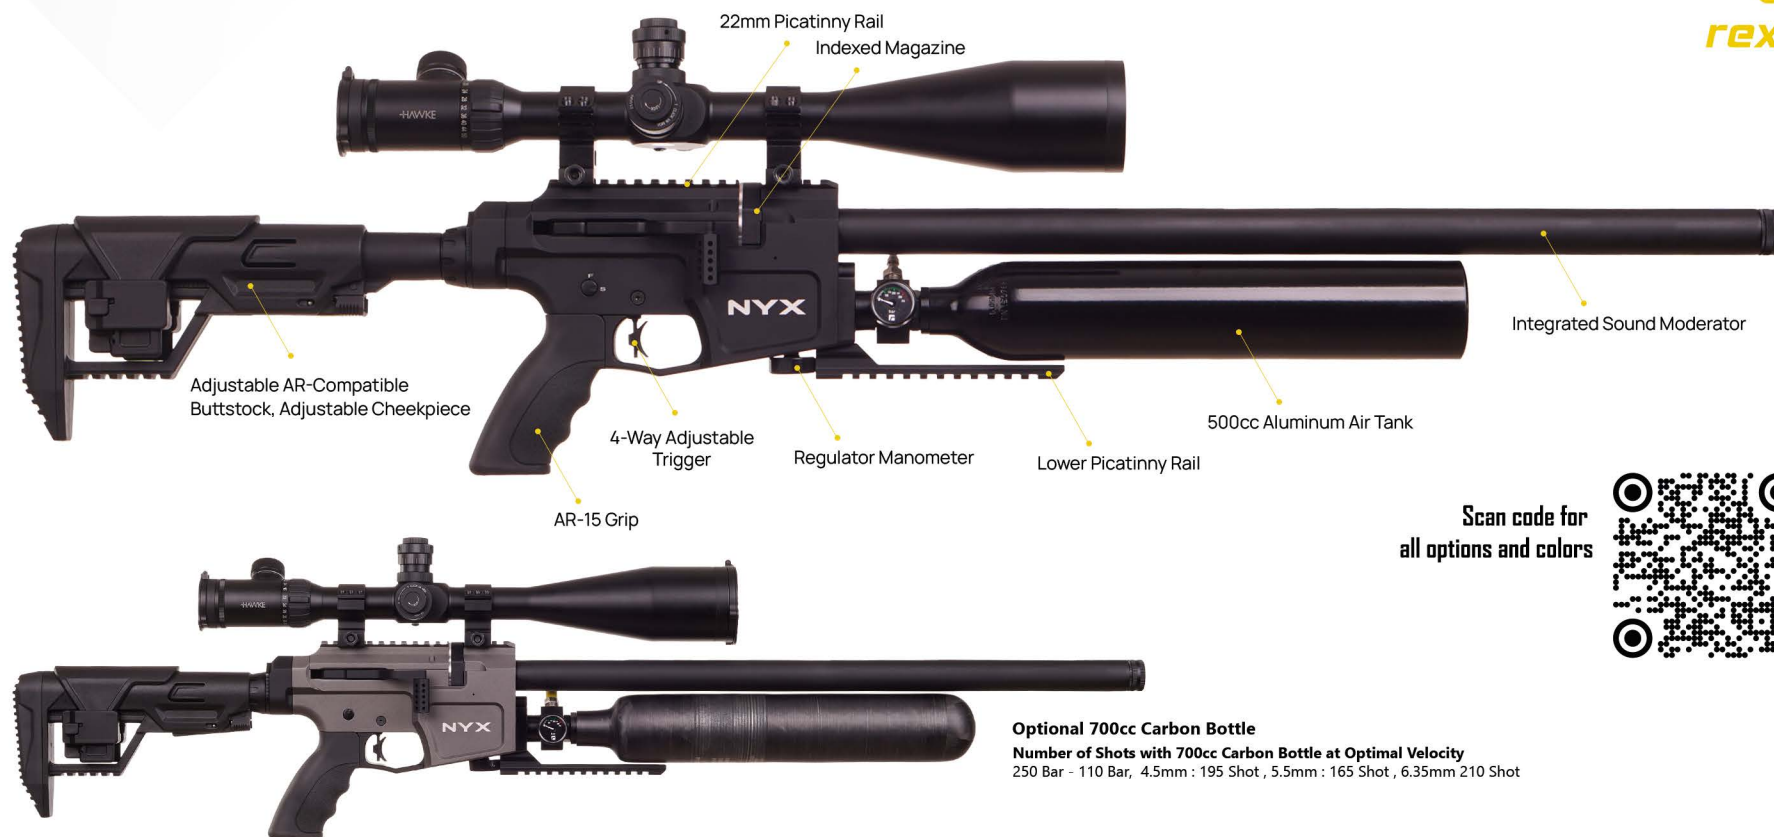

Scan code for
all options and colors



Optional 700cc Carbon Bottle

Number of Shots with 700cc Carbon Bottle at Optimal Velocity

250 Bar - 110 Bar, 4.5mm : 195 Shot, 5.5mm : 165 Shot, 6.35mm 210 Shot

Model	NYX		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	308m/s (1000fps)	274m/s (900fps)	243m/s (800fps)
Energy	25.4 Joule / 18.7 ft.lbs	44.3 Joule / 32.6 ft.lbs	48.9 Joule / 36.09 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	200	130	160
Air Tube Volume	500cc / Optional 700cc Carbon Bottle		
Fill Pressure	250 Bar		
Stock	Tactical Telescopic Stock Elevation Adjustable Cheek Rest.		

Overall Length	1050 mm (41.3")
Barrel Length	480 mm (18.8")
Weight	4.415 kg (9.813 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets


* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

www.reximex.com

PCP AIRGUNS / NYX



ZONE

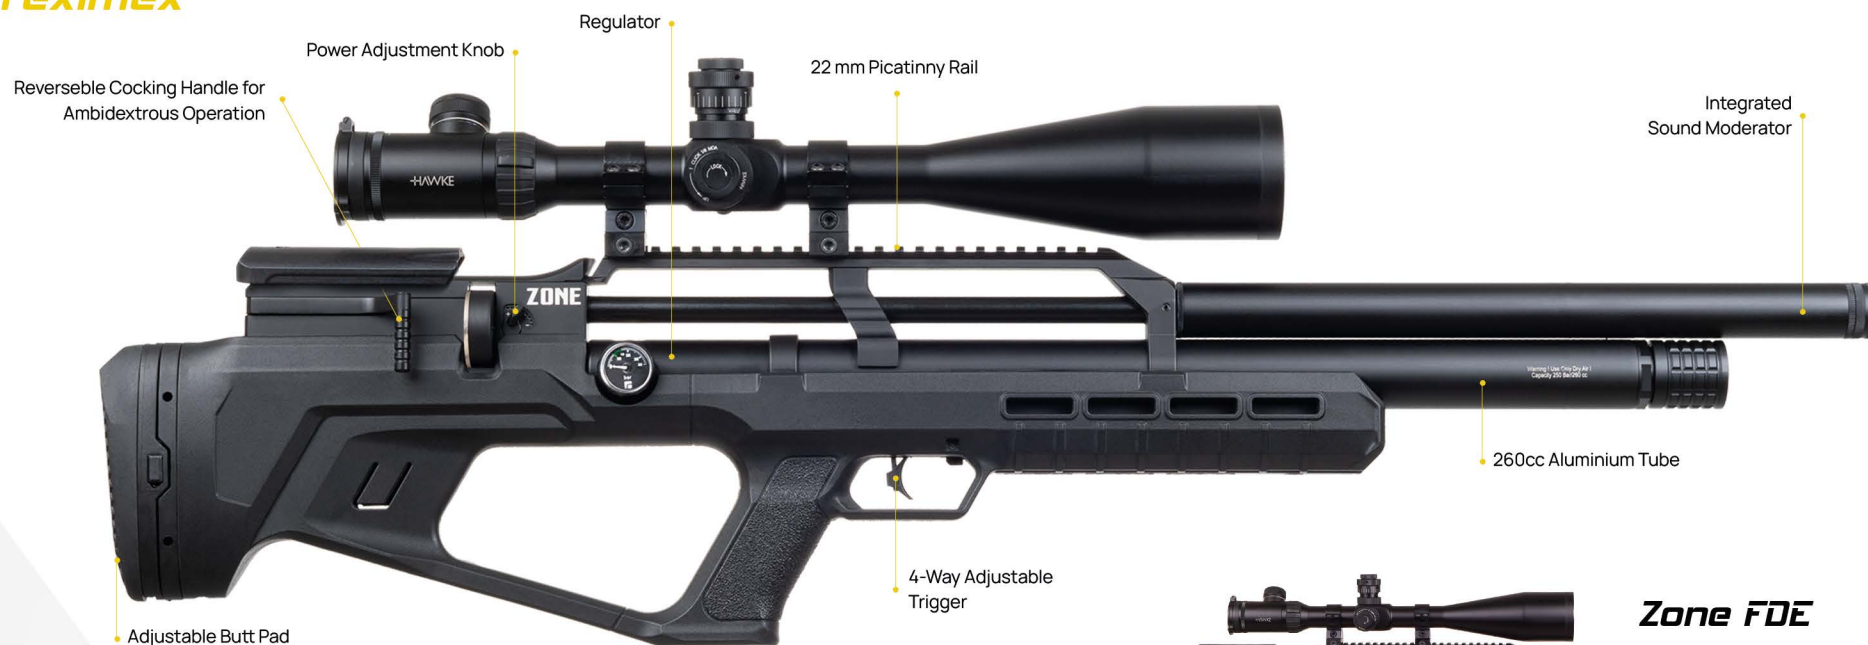

Scan code for
all options and colors



Zone FDE

Model	ZONE		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	304m/s (1000fps)	270m/s (935fps)	25m/s (850fps)
Energy	25.4 Joule / 18.7 ft.lbs	47.7 Joule / 35.2 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	75	65	55
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design High Quality Synthetic Stock, Adjustable Butt Pad		

Overall Length	900 mm (35.4")
Barrel Length	580 mm (22.8")
Weight	3.3 kg (7.27 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

ZONE W



Model	ZONE W		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	304m/s (1000fps)	270m/s (935fps)	25m/s (850fps)
Energy	25.4 Joule / 18.7 ft.lbs	47.7 Joule / 35.2 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	75	65	55
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Turkish Walnut		

Overall Length	900 mm (35.4")
Barrel Length	580 mm (22.8")
Weight	3.3 kg (7.27 lbs)
Regulator	Standard

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.



APEX

Adjustable Power



2 Way Adjustable 22mm Picatinny Rail



Integrated Sound Moderator



4-Way Adjustable Trigger
& Manual Safety



Reversible Cocking Lever
For Ambidextrous Use

Scan code for all options and colors



Model	APEX		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	340m/s (1110fps)	270m/s (880fps)	255m/s (830fps)
Energy	31.3 Joule / 23.1 ft.lbs	42.3 Joule / 31.2 ft.lbs	53.9 Joule / 39.8 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	112	96	80
Air Tube Volume	310cc		
Fill Pressure	250 Bar		
Stock	Bullpup Design High Quality Synthetic Stock Adjustable Butt Pad		

Overall Length	850 mm (33.4")
Barrel Length	480 mm (18.9")
Weight	3 kg (6.6 lbs)
Regulator	Optional

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

*Data may vary on products with optional regulator.

* Scope is not included.




Apex
Monster Orange




Apex
Monster Green

Adjustable Cheek Piece

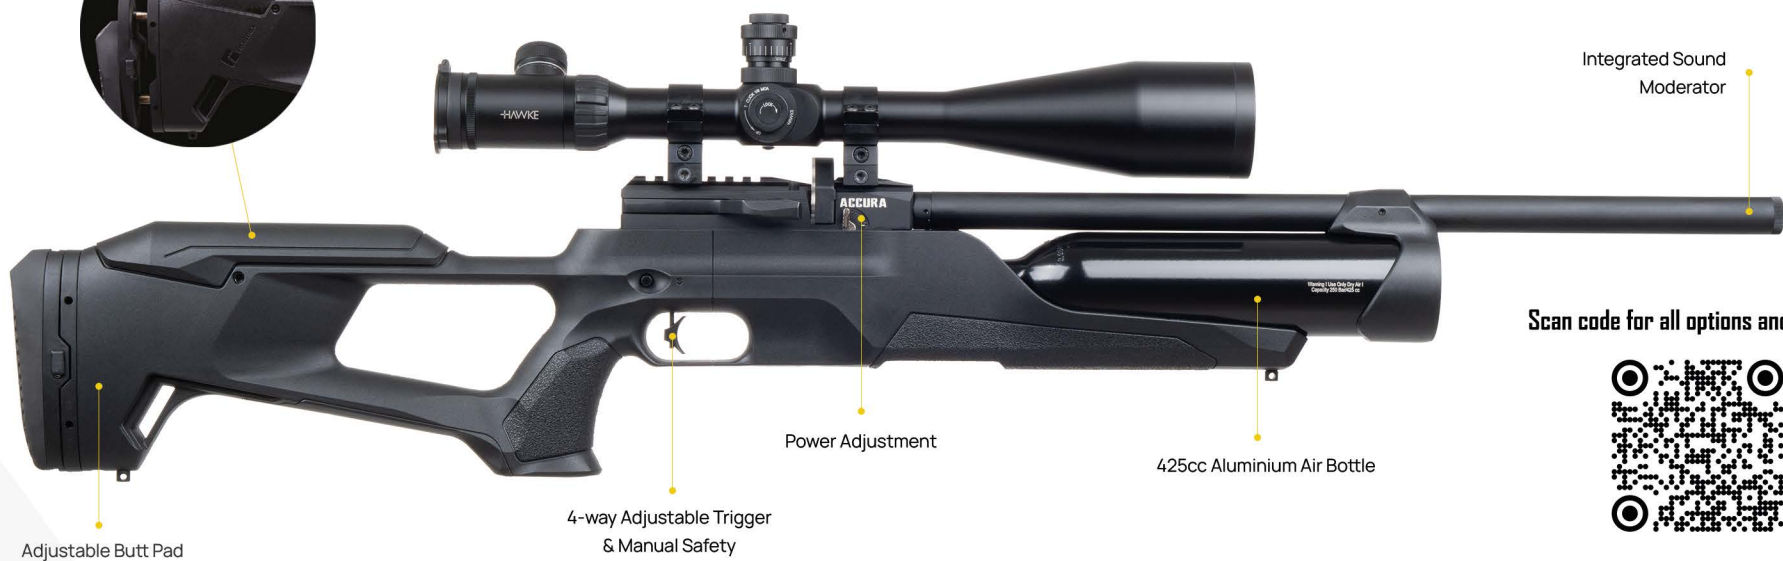

Scan code for all options and colors



Model	ACCURA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	168	144	120
Air Tube Volume	425cc		
Fill Pressure	250 Bar		
Stock	High Quality Synthetic Stock Turkish Walnut Adjustable Cheek Piece Adjustable Butt Pad		

Overall Length	1010 mm (39.7")
Barrel Length	380 mm (14.9")
Weight	Synthetic: 3.5 kg (7.7lbs)

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

ACCURA W



Model	ACCURA W		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	168	144	120
Air Tube Volume	425cc		
Fill Pressure	250 Bar		
Stock	Turkish Walnut Stock , Adjustable Cheek Piece		


Overall Length	1010 mm (39.7")
Barrel Length	380 mm (14.9")
Weight	Wood: 3.1kg (6.8lbs)

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

TORMENTA

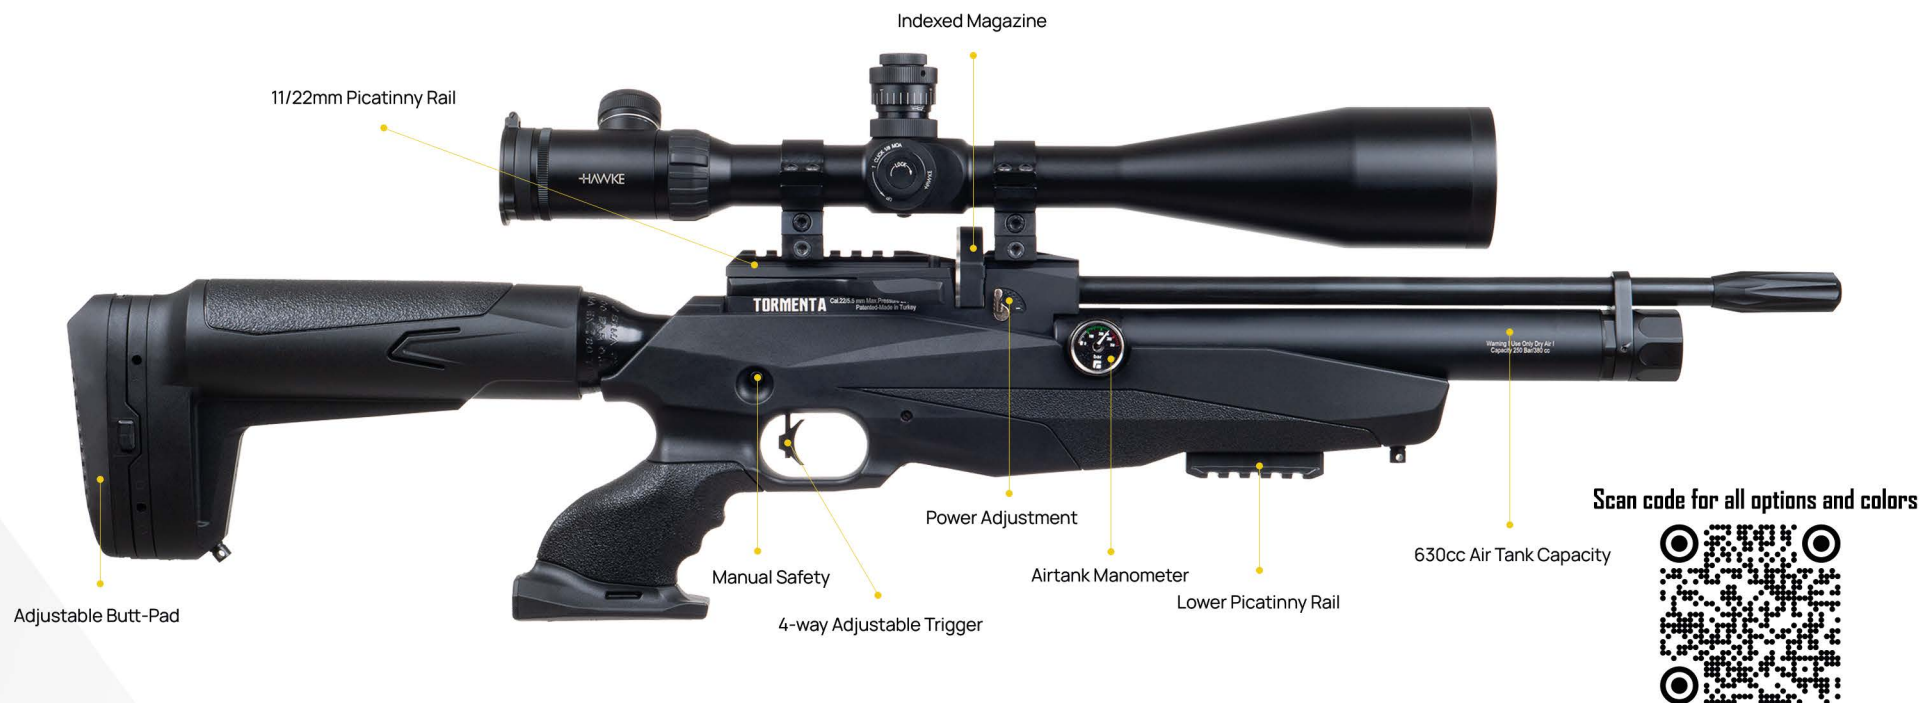

Model	TORMENTA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	332m/s (1090fps)	270m/s (880fps)	255m/s (840fps)
Energy	30.2 Joule / 22.3 ft.lbs	42.3 Joule / 31.2 ft.lbs	53.9 Joule / 39.76 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	126	108	90
Air Tube Volume	380cc (250 cc Rear Bottle + 130 cc Front Cylinder)		
Fill Pressure	250 Bar		
Stock	High Quality Synthetic Stock Adjustable Butt Pad		

Overall Length	850 mm (33.4")
Barrel Length	380 mm (14.9")
Weight	2.8 kg (6.17 lbs)

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

TORMENTA W

Turkish Walnut Stock



Tormenta Color Options



*Tormenta
Ambush*



*Tormenta
Thunder White*



*Tormenta
Red Fire*




Scan code for all options and colors



DAYSTAR



Scan code for all options and colors



DAYSTAR
Thunder Snow



DAYSTAR
Ambush

Model	DAYSTAR		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	98	84	70
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	High Quality Synthetic Stock, Adjustable Cheek Piece, Adjustable Butt Pad		

Overall Length	1050 mm (41.3")
Barrel Length	580 mm (22.8")
Weight	Synthetic: 2.8 kg (6.1lbs)
Regulator	Optional

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

*Data may vary on products with optional regulator.

* Scope is not included.

DAYSTAR W



DAYSTAR W
Orange Laminated



DAYSTAR W
Blue Laminated

Scan code for all options and colors



Model	DAYSTAR W		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1150fps)	290m/s (950fps)	260m/s (850fps)
Energy	33.6 Joule / 24.8 ft.lbs	49.3 Joule / 36.3 ft.lbs	55.2 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	98	84	70
Air Tube Volume	260cc		
Fill Pressure	250 Bar		
Stock	Turkish Walnut Stock, Adjustable Cheek Piece, Optional Laminated Stocks		

Overall Length	1050 mm (41.3")
Barrel Length	580 mm (22.8")
Weight	Wood: 3.2kg (7lbs)
Regulator	Optional

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

*Data may vary on products with optional regulator.

* Scope is not included.

NEW



LYRA



Power Adjustment Knob

4-Way Adjustable
Trigger

Turkish Walnut

Rubber Butt Pad



Scan code for all options and colors

www.reximex.com


PCP AIRGUNS / LYRA



NEW

www.reximex.com

PCP AIRGUNS / LYRA

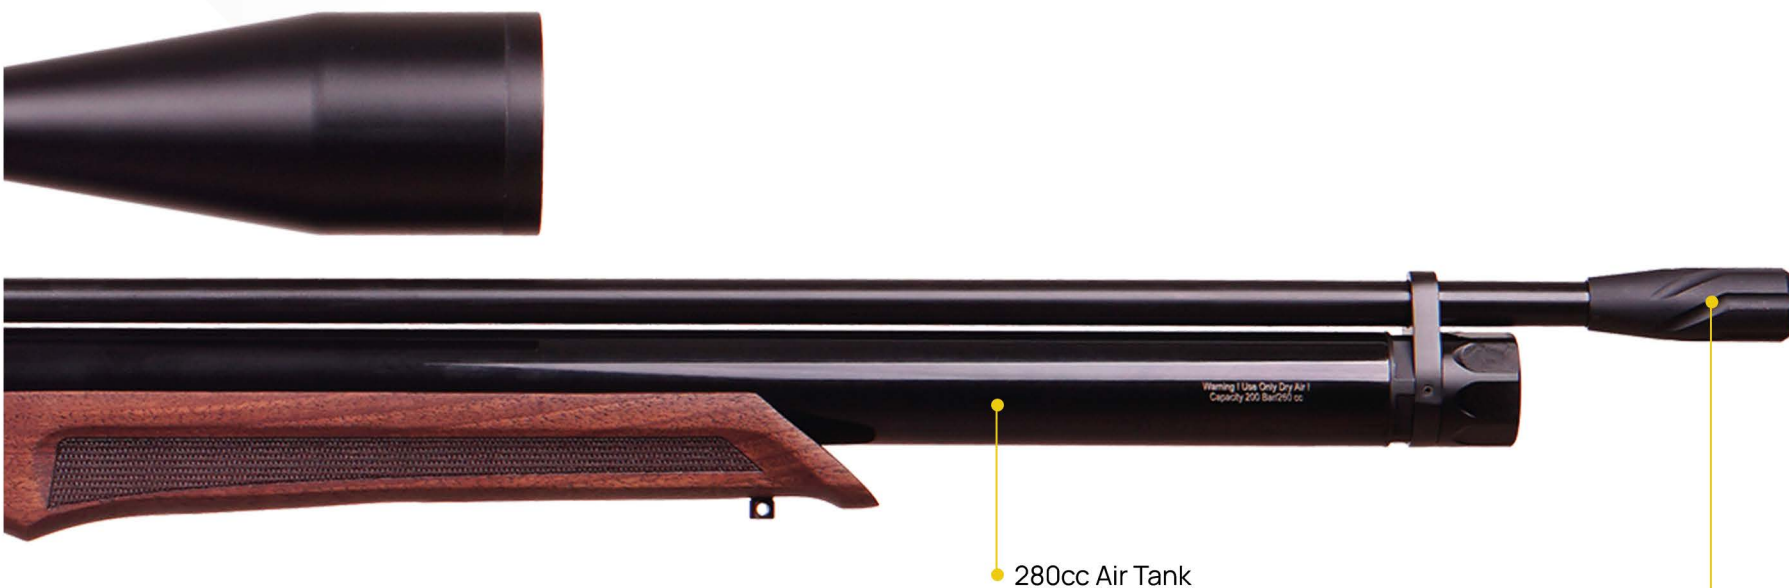

Model	LYRA		
Cocking System	SIDE LEVER		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Maximum Muzzle Velocity	350m/s (1115fps)	290m/s (965fps)	260m/s (850fps)
Energy	31.6 Joule / 23.3 ft.lbs	50.8 Joule / 37.5 ft.lbs	55.4 Joule / 40.7 ft.lbs
Magazine Capacity	14	12	10
Number of Shots At Optimal Velocity (250-110 Bar)	110	75	65
Air Tube Volume	280cc		
Fill Pressure	200 Bar		
Stock	Turkish Walnut		

Overall Length	1070 mm (41.3")
Barrel Length	580 mm (22.8")
Weight	3.45 kg (7.6 lbs)

* Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

* Scope is not included.

NEW

www.reximex.com

RIFLE / PANGEA



LYRA-K

Rubber Stock

Carabine Comfortable Stock

4 Way Adjustable Trigger
& Manual Safety





Cocking System			Side Lever	Fill Pressure	250 Bar
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	Stock	Turkish Walnut
Max Muzzle Velocity (*)	305m/s (1000fps)	275m/s (900fps)	244m/s (800fps)	Overall Length	880mm (34,6")
Energy (*)	31.6 Joule/ 23.3 ft.lbs	50.8 Joule/ 37.5 ft.lbs	55.4 Joule/ 40.7 ft.lbs	Barrel Length	380mm (14.9")
Magazine Capacity	14	12	10	Weight	2.8 kg (6.1 lbs)
Number of Shots At Optimal Velocity (200-100Bar)			100, 70, 60		
Air Tube Volume			250cc		



Reximex ABS Cases

Reximex Hard Case
with wheels

Length: 111.5cm
Width: 33.5cm



Reximex Hard Case

Length: 97cm
Width: 26cm



Reximex Filling Equipments



Scuba
Filling Kit

FOR META & ZONE and REG.DAYSTAR & REG.APEX

01



Filling Probes



FOR THRONE-META PLUS & PREMIUM and All Other Foster Types
03



02

FOR RP & RPA



Reximex
Hand Pump

Reximex Air Rifle Sound Moderators



Long SilentForce



Short SilentForce

Accessories

Air Tanks

01



02



03



330cc / 480cc / 700cc Carbon Fiber
Air Bottles Are Available



Regulator



Manometer



Regulator
Manometer

25 cal



22 cal



177 cal



PCP Rifle Magazine



22mm Lower Picattiny Rail



RP / RPA Magazine

25 cal



22 cal



177 cal



Single Shot Tray

NOTES



NOTES





reximex

Aim for the next level



@reximexarms

Bayavşar Mah. 41958 Sk. No:3
42700 Beyşehir / Konya / TÜRKİYE

info@reximex.com
www.reximex.com

+90 (332) 511 00 55
+90 (332) 514 80 55