

About **Reximex**

Reximex was founded in Konya-Beyşehir in 2015. Our main goal is to produce world class products using the latest R&D and Manufacturing proficiency, with the guidance of our dynamic Management and Production team.

Reximex achieved a customer portfolio over 60 countries in a very short time with the vision of never compromise philosophy from quality, innovation and customer satisfaction.

We Have A Wide Product Range!

We always aim to respond to the expectations of our customers at the highest level. At the same time, we are always working on launching new products by following the global end-user trends very carefully.

We design customizable products!

We analyze our customers' conditions & area of use and personal preferences; and we design products that exceeds our customers' expectations. We reveal easily customizable products that maximizes the end-user experience.

We always bring our manufacturing skills to next level and keep up with the latest technologies!

Reximex production plant uses modern & latest technology equipment in an integrated production facility of 12.000 square meters. Our Production Facility & Crew is continuously developing and expanding in accordance with our customers' needs and our future business plans.



PANGEA

BOLT ACTION RIFLE



.300 Win Mag. (Soon) 7 mm Rem Mag. (Soon) Completly, compatible with after market pre-fit Remington 700 Barrels



Microcell Recoil Pad Lead to Incredibly Light and Soft Recoil Pad



Three-lug Locking with 60-degree Bolt Throw



Picatinny Rail Mounted on Receiver



5/8"X24 Muzzle Thread Optional



Bolt Release Button



Firing Pin Indicator



T-REX Trigger Systems
Fully Adjustable Pull Weight of 2 - 4 lbs



Compatible with Rem 700 LA magazine variations

PANGEA

BOLT ACTION RIFLE






Scan code for all options and colors

| Barrel Length | 20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread) | Bolt | | Three-lug Locking with 60-degree Bolt Throw |
|-------------------|--|-----------|--------------|---|
| Barrel Contour | 17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted) | Safety | | Trigger Safety |
| Twist Rate | 1:10 (4 grooves) (1:12 on Match Barrels) | Trigger | | Fully adjustable pull weight of 2 - 4 lbs |
| Magazine | Floorplate 3+1 | Sight | | Picatinny Rail Mounted on receiver |
| Magazine Compatib | ility Rem 700 LA Box Mag. Variations. | Accuracy | 3-Shot Sub-I | Moa Guaranteed at 100 Yards with Premium Factory Ammunition |
| Overall Length | 40.41" | Stock | | Selected Turkish Walnut, Oil Finished |
| Average Weight | 7.80 lbs | Stock Cor | mpatibility | Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN |



PANGEA

BOLT ACTION RIFLE





300 Win Mag. (Soon) 7 mm Rem Mag. (Soon)

Completly, compatible with after market pre-fit Remington 700 Barrels

| Barrel Length | 20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread) | Bol | t | | Three-lug Locking with 60-degree Bolt Throw |
|---------------------|--|------|--------|-------------|---|
| Barrel Contour | 17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted) | Saf | ety | | Trigger Safety |
| Twist Rate | 1:10 (4 grooves) (1:12 on Match Barrels) | Triç | ger | | Fully adjustable pull weight of 2 - 4 lbs |
| Magazine | Floorplate 3+1 | Sig | ht | | Picatinny Rail Mounted on receiver |
| Magazine Compatibil | ity Rem 700 LA Box Mag. Variations. | Acc | uracy | 3-Shot Sub- | Moa Guaranteed at 100 Yards with Premium Factory Ammunition |
| Overall Length | 40.15" | Sto | ck | | Selected Turkish Walnut, Oil Finished |
| Average Weight | 8.25 lbs | Sto | ck Con | npatibility | Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN |



Fluted Barrel (Optional)



5/8"X24 Muzzle Thread (Optional)



PANGEA HUNTER

BOLT ACTION RIFLE



.243 Win 6.5 Creedmoor

.308 Win .270 Win

.30-06 SpringField

300 Win Mag. (Soon)

7 mm Rem Mag. (Soon)

Completly, compatible with after market pre-fit Remington 700 Barrels

| Barrel Length | 20" / 22" / 24" (Optional 5/28" x 24 Muzzle Thread) | Bolt | | Three-lug Locking with 60-degree Bolt Throw |
|----------------------|--|-----------|-------------|--|
| Barrel Contour | 17mm (LW) 19mm (SW) 22mm (Match) w/(Optional Fluted) | Safety | | Trigger Safety |
| Twist Rate | 1:10 (4 grooves) | Trigger | | Fully adjustable pull weight of 2 - 4 lbs |
| Magazine | Floorplate 3+1 | Sight | | Picatinny Rail Mounted on receiver |
| Magazine Compatibili | ty Rem 700 LA Box Mag. Variations. | Accuracy | 3-Shot Sub- | Moa Guaranteed at 100 Yards with Premium Factory Ammunition |
| Overall Length | from 44" to 45" (w/24" Barrel) | Stock | | Polymer Stock with 3 Spacer for LOP and Adjustable Cheek Riser |
| Average Weight | 7.00 lbs | Stock Cor | npatibility | Rem 700 LA variations on Magpul – GRS – MDT - McMILLAN |



3 Spacers for length of pull adjustment. (0.2", 0.35" and 0.55" width). Stock Length of pull can be extended from 13.25"



Adjustable Cheek Riser



Remington 700 Long Action Foot prints means compatible with All Long Action after market stocks and trigger systems.





Scan code for all options and colors







BARREL LENGTH
113 mm / 4.45 "



MAG. CAPACITY 15 Round Steel Magazine



SYSTEM
Semi Auto
Striker-Fired



WEIGHT without magazine 696 g / 24.55 oz



WEIGHT

with empty magazine 776 g / 27.34 oz

BEYOND THE SAFETY STANDARDS



TRIGGER SAFETY



STRIKER STATUS INDICATOR



LOADED CHAMBER INDICATOR



TRX 9 pistol is designed and produced with stricter safety systems to prevent unintentional discharge should the pistol be dropped or misused. Trigger Safety, Firing Pin Block, Striker Status Indicator & Loaded Chamber Indicator provides the ultimate shooting pleasure for everyone with the safety in mind.



REVERSIBLE MAGAZINE CATCH

ADVANCED TEXTURE

Progressive design texture of TRX9 pistol provides smooth touch and firm grip during handling and shooting.

2 BACKSTRAP SIZES

TRX9 comes with 2 modular backstraps in medium and large sizes for different trigger distances.

Backstraps are made of elastomer polymer and together with the special design surface texture on them, you have a much comfortable and softer feel in your palm.



MIL-STD 1913 PICATINNY RAIL

Slide incorporates a Mil-Std 1913 Picatinny Rail for suitable sighting devices-such as laser sights- or flashlights.

FAST FIELD STRIPPING

Field stripping the TRX9 is toolless and can be done in a few seconds at the touch of a button and simply by lifting up the slide. Take down button locks back when the slide is installed back into the chassis.

OPTICS-READY SLIDE

Steel slide is equipped with metal rear and front sight installed. Red Dot Sights or other compatible optic sights can easily be installed on the Optic Mount Slot on the slide.

Compatible with "Trijicon RMRcc and Shield RMS/RMSc"



DOUBLE STACK METAL MAGAZINE

Metal construction and custom design magazines are made for long durability and severe endurance.

2 magazines in 15 round capacity (double stack) are included.







AMBIDEXTROUS

TRX9 is equipped with an ambidextrous slide stop and reversible magazine release. Ambidextrous grip is made of advanced polymer and designed to fit perfectly to both right- and left-hand shooters.








TECHNICAL SPECIFICATIONS

| Firing System | Semi-Auto Striker-Fired |
|---------------------------|--|
| | |
| Caliber | 9x19mm |
| • Туре | Compact Size |
| Magazine Capacity | 15 round - Steel Magazine |
| Slide | Oxidation Proof -Chromium, Nickel, Molybdenum Forged Steel |
| Lower Frame | Advanced Polymer |
| • Barrel | Oxidation Proof -Chromium, Nickel, Molybdenum Steel Barrel |
| Barrel Length | 107.95mm / 4.25" |
| Rate of Twist | 1:10 w/6 grooves |
| • Sights | Metal Rear and Front Sight 3 White Dots Optic Mount Slot for Red Dot Sights (1.61" length) |
| • Weight without magazine | 696 gram /24.55 ounces |
| • Weight w/empty magazine | 776 gr / 27.34 ounces |
| • Features | Reversible Magazine Catch Mag-Well MIL-STD-1913 Picatinny Rail Modular Backstraps (M and L sizes) Ambidextrous Slide Release |
| Safety Systems | Trigger Safety Firing Pin Block Loaded Chamber Indicator (LCI) Striker Status Indicator |

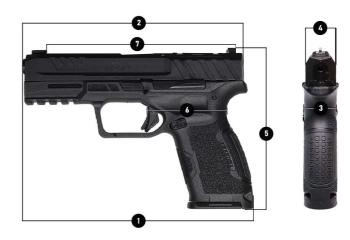

| LENGTH (OVERALL) 7.56" | SLIDE LENGTH 7.29" | WIDTH (OVERALL) 1.18" |
|---------------------------|--------------------------------|--------------------------------|
| 4 SLIDE WIDTH 1.03" | 6 HEIGHT INC. MAG. 5.22" | 6 TRIGGER DISTANCE 2.73" |
| | LINE OF SIGHT 6.30" | |

Color Options





TRX9 C18






TRX9 C18



Scan code for all options and colors

TECHNICAL SPECIFICATIONS

| System | Single Action Trigger, Striker-Fired Semi-Auto |
|---------------------------|--|
| Caliber | 9x19mm |
| • Type | Full Size |
| Magazine Capacity | 18 round - Steel Magazine |
| • Slide | Oxidation Proof -Chromium, Nickel, Molybdenum Steel |
| Lower Frame | Advanced Polymer |
| Barrel | Oxidation Proof -Chromium, Nickel, Molybdenum Steel Drilled Barrel |
| Barrel Length | 125mm / 4.92" |
| • Rate of Twist | 1:10 w/6 grooves |
| • Sights | Metal Rear and Front Sight 3 White Dots Optic Mount Slot for Red Dot Sights (1.61" length) |
| Weight without magazine | 727 gram /25.64 oz |
| • Weight w/empty magazine | 807 gr / 28.46 oz |
| • Features | Reversible Magazine Catch Mag-Well MIL-STD-1913 Picatinny Rail Modular Backstraps (M and L sizes) Ambidextrous Slide Release |
| Safety Systems | Trigger Safety Firing Pin Block Loaded Chamber Indicator (LCI) Striker Status Indicator |

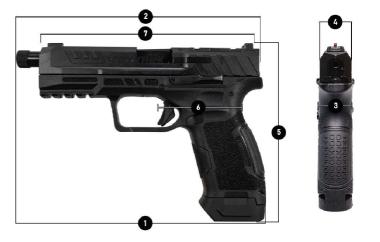

| LENGTH (OVERALL) 208.4 mm / 8.20" | SLIDE LENGTH 185.35 mm / 7.29" | 3 WIDTH (OVERALL) 30.20 mm / 1.18" |
|--------------------------------------|---|--|
| SLIDE WIDTH 26.20 mm / 1.03" | 5 HEIGHT INC. MAG. 150.7 mm / 5.93" | TRIGGER DISTANCE 69.50 mm / 2.73" |
| | 7 LINE OF SIGHT 160.20 mm / 6.30" | |



TRX9 C18



SNIPER GRAY & GOLD EDITION





FDE













RS 512



| Model | RS 512 | | |
|--------------------------|---|--|--|
| System | Gas operated semi auto w/rotating bolt head locking | | |
| Gauge | 12Ga | | |
| Chamber | 76mm | | |
| Available Barrel Lenghts | 66cm / 71cm / 76 and 81cm | | |
| Receiver | Anodized Aluminium | | |
| Magazine Capacity | 5+1/7+1/9+1 | | |
| Stock | Synthetic - Rubber Inlay Anti-Slip Textured | | |
| Trigger Guard | Techno Polymer | | |

| Recoil Pad | Microcell Recoil Pad | | |
|-----------------------------|--|--|--|
| Weight (w/71cm Barrel) | 3,1kg | | |
| Total Lenght(w/71cm Barrel) | 125cm | | |
| Safety | Cross-Bolt Trigger Safety | | |
| Sight | Front Fiber Optic | | |
| Choke | 90mm REX Chokes C/IC/M/IM/F | | |
| Shim Kit | 5 Shims for Adjusment of Drop and Cast | | |







Scan code for all options and colors

RS 212



| Model | RS 212 |
|--------------------------|--------------------------------|
| System | Gas Operated Semi Auto |
| Gauge | 12Ga |
| Chamber | 76mm |
| Available Barrel Lenghts | 66cm/71cm/76cm/ and 81cm |
| Receiver | Aluminium |
| Magazine Capacity | 5+1/7+1/9+1 |
| Stock | Synthetic - Anti Slip Textured |
| Trigger Guard | Techno Polymer |

| Recoil Pad | High Density PU Material | | |
|------------------------------|--|--|--|
| Weight (w/71cm Barrel) | 3,15kg | | |
| Total Lenght (w/71cm Barrel) | 123cm | | |
| Safety | Cross-Bolt Trigger Safety | | |
| Sight | Front Fiber Optic | | |
| Choke | 70mm REX Chokes C/IC/M/IM/F | | |
| Shim Kit | 5 Shims for Adjusment of Drop and Cast | | |



Scan code for all options and colors



TACTICAL & HOME DEFENCE



Scan code for all options and colors



RS 212 HD FDE



| System | Semi-Auto | | |
|--------------------------|--------------------------------|--|--|
| Gauge | 12Ga | | |
| Chamber | 76mm | | |
| Available Barrel Lenghts | 51cm | | |
| Receiver | Anodized Aluminium | | |
| Magazine Capacity | 7+1 | | |
| Stock | Synthetic - Anti-Slip Textured | | |
| Trigger Guard | Techno Polymer | | |

| Recoil Pad | High Density PU Material |
|--------------|--|
| Weight | 2.6kg |
| Total Lenght | 99.8 cm |
| Safety | Cross-Bolt Trigger Safety |
| Sight | Tactical Rear & Front Sight |
| Shim Kit | 5 Shims for Adjusment of Drop and Cast |







| System | Pump Action | |
|--------------------------|--------------------------------|--|
| Gauge | 12Ga | |
| Chamber | 76mm | |
| Available Barrel Lenghts | 51cm | |
| Receiver | Anodized Aluminium | |
| Magazine Capacity | 7+1 | |
| Stock | Synthetic - Anti-Slip Textured | |

| Recoil Pad | High Density PU Material | |
|---------------|--|--|
| Weight | 2.6kg | |
| Total Lenght | 99.8 cm | |
| Safety | Cross-Bolt Trigger Safety | |
| Sight | Rear & Front Sight | |
| Shim Kit | 5 Shims for Adjusment of Drop and Cast | |
| Trigger Guard | Techno Polymer | |

PCP AIRGUNS







LYRA-BP



4 Way Adjustable Triger & Manual Safety

| Side Lever | | | Fill Pressure | 200 Bar |
|-------------------------|--|---|---|--|
| 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal | Stock | Turkish Walnut |
| 305m/s (1000fps) | 275m/s (900fps) | 244m/s (800fps) | Overal Length | 625mm (24.6") |
| 31.6 Joule/ 23.3 ft.lbs | 50.8 Joule/ 37.5 ft.lbs | 55.4 Joule/ 40.7 ft.lbs | Barrel Length | 420mm (16,5") |
| 14 | 12 | 10 | Weight | Weight 3.1 kg (6.8 lbs) |
| 60 | 45 | 35 | , , | with 8.44grain 177cal- 18.13grain |
| 210сс | | | *Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors. | |
| | 4.5mm / .177cal 305m/s (1000fps) 31.6 Joule/ 23.3 ft.lbs 14 60 | 4.5mm / .177cal 5.5mm / .22cal 305m/s (1000fps) 275m/s (900fps) 31.6 Joule/ 23.3 ft.lbs 50.8 Joule/ 37.5 ft.lbs 14 12 60 45 | 4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal 305m/s (1000fps) 275m/s (900fps) 244m/s (800fps) 31.6 Joule/ 23.3 ft.lbs 50.8 Joule/ 37.5 ft.lbs 55.4 Joule/ 40.7 ft.lbs 14 12 10 60 45 35 | 4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal Stock 305m/s (1000fps) 275m/s (900fps) 244m/s (800fps) Overal Length 31.6 Joule/ 23.3 ft.lbs 50.8 Joule/ 37.5 ft.lbs 55.4 Joule/ 40.7 ft.lbs Barrel Length 14 12 10 Weight 60 45 35 * Velocity figures are tested 22cal and JSB pellets *Velocity/Energy results materials *Velocity/Energy results *Velocity/Energy r |

MORPHO





| Model | Morpho | |
|--------------------------|-------------------------|-------------------------|
| Cocking System | CO2 Airgun | |
| Caliber | 4.5mm/.177cal | 5.5mm/22cal |
| Max. Muzzle Velocity (*) | 400 fps/121.9 m/s | 350 fps/106.6 m/s |
| Energy (*) | 4.07 Joule/ 2.99 ft.lbs | 4.93 Joule/ 6,70 ft.lbs |
| Magazine Capacity | 14 | 12 |
| Shots Per Fill | 40 | 36 |
| Safety | Trigger Safety | |
| Sight | Fiber Optic Sight | |

| Air Tube Volume | 12 gr CO2 |
|-----------------|-----------------|
| Stock | Synthetic |
| Overal Length | 612mm (24.09") |
| Barrel Length | 201mm (7.9") |
| Weight | 1.3 kg (2.9lbs) |

^{*} Velocity figures are tested with 1.44grain 177cm 18.13grain 22cal and 25.39grain 25cal JSB pelets

^{*} Veiccity Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



NYX COMPACT



| Model | NYX COMPACT | | |
|---|--------------------------|--------------------------|---------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 308m/s (1000fps) | 274m/s (900fps) | 243m/s (800fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 44.3 Joule / 32.6 ft.lbs | 48.9 Joule / 36.09 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 90 | 75 | 75 |
| Air Tube Volume | 425cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Tactical Telescopic Stoc | k Elevation Adjustable C | heek Rest. |

| Overal Length | 820 mm / 32.2" | |
|---------------|-------------------|--|
| Barrel Length | 380 mm / 14.96" | |
| Weight | 7.70 lbs & 3.5 kg | |
| Regulator | Standard | |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

LIEVA






- * Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

| Model | LIEVA | Number Of Shots At Optimal Velocity(200-100 Bar) | 60 / 40 / 40 |
|------------------------|---|--|--------------------|
| Cocking System | Lever Action | Air Tube Volume | 105cc |
| Caliber | 4.5mm / .177 , 5.5mm / .22 , 6.35mm / .25 | Fill Pressure | 250 BAR |
| Max.Muzzle Velocity(*) | 900 fps / 274,3 m/s, 750 fps / 228,6 m/s, 650 fps / 198,1 m/s | Stock | Turkish Walnut |
| Energy (*) Joules | 20,64 Joule / 30,80 Joule / 32,39 Joule | Overall Length | 980mm (38,58") |
| ft.lbs | 15.18 ft.lbs / 22.65 ft.lbs / 23.82 ft.lbs | Barrel Length | 520mm (20.4") |
| Magazine Capacity | 14 , 12 , 10 | Weight | 2.2 kg (4.85 lbs) |
| | | Regulator | Standart |

RP / RPA SILVER

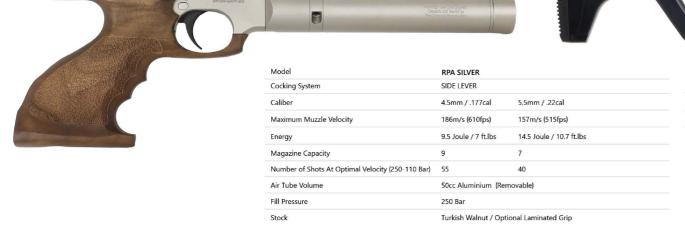

| Overal Length | 330 mm (13") |
|---------------|----------------------|
| Barrel Length | 200 mm (7.9") |
| Weight | 900 grams (1.98 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



TORMENTA LITE SERIES



| Model | Tormenta Lite |
|------------------------|---|
| Cocking System | Side Lever |
| Caliber | 4.5mm / .177 , 5.5mm / .22 , 6.35mm / .25 |
| Max.Muzzle Velocity(*) | 290 m/s / 950 fps , 259 m/s 900 fps , 243 m/s 800 fps |
| Energy (*) Joules | 22.99 / 44.34 / 49.08 |
| ft.lbs | 16.91 / 32.61 / 36.09 |
| Magazine Capacity | 14 , 12 , 10 |
| | |

| Number Of Shots At Optimal Velocity(200-100 Bar) | 75, 65, 65 |
|--|---|
| Air Tube Volume | 130cc |
| Fill Pressure | 200 Bar |
| Stock | Adjustable AR Compatible Telescopic Adjustable Stock |
| Overall Length | 850 mm / 33.4 " |
| Barrel Length | 380 mm / 14.9 " |
| Weight | 2.8 kg / 6.17 lbs |
| Regulator | Optional |

META LITE SERIES





| Model | META PLUS LITE | | |
|---|--------------------------|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 332m/s (1000fps) | 269m/s (880fps) | 243.8m/s (800fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 42.2 Joule / 31.2 ft.lbs | 48.9 Joule / 36.1 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 225 | 155 | 160 |
| Air Tube Volume | 515cc (425cc Aluminun | n Bottle + 90cc Pre-Char | mber) |
| Fill Pressure | 250 Bar | | |
| Stock | Bullpup Design, High C | Quality Aluminium Stock | |

| Overal Length | 780 mm (23.4") | |
|---------------|-------------------|--|
| Barrel Length | 480 mm (18.8") | |
| Weight | 7.87 lbs & 3.1 kg | |
| Regulator | Standard | |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



| Model | META LITE | | |
|---|--------------------------|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 332m/s (1000fps) | 269m/s (880fps) | 243.8m/s (800fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 42.2 Joule / 31.2 ft.lbs | 48.9 Joule / 36.1 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 125 | 85 | 80 |
| Air Tube Volume | 260cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Bullpup Design, High C | Quality Aluminium Stock | |

| Overal Length | 750 mm (29.5") |
|---------------|-------------------|
| Barrel Length | 480 mm (18.8") |
| Weight | 7.87 lbs & 3.1 kg |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



Model

Stock

META Premium



| Cocking System | SIDE LEVER | | |
|---|--------------------------|--------------------------|--------------------------|
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 335.2m/s (1100fps) | 304m/s (1000fps) | 274m/s (900fps) |
| Energy | 30.7 Joule / 22.6 ft.lbs | 54.2 Joule / 40.2 ft.lbs | 61.9 Joule / 45.6 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 210 | 150 | 120 |
| Air Tube Volume | 570cc (480cc Carbon B | ottle + 90cc Pre-Chambe | er) |
| Fill Pressure | 250 Bar | | |

META PREMIUM

NEW Meta Lite in synthetic stock is now available

Bullpup Design, High Quality Aluminium Stock 3-Axis Adjustable Butt Pad with Monopod

| Overal Length | 1000 mm (39.3") |
|---------------|------------------|
| Barrel Length | 700 mm (27.5") |
| Weight | 4.2 kg (8.6 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.







META Plus



| Model | META PLUS | | |
|---|---|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 332m/s (1000fps) | 269m/s (880fps) | 243.8m/s (800fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 42.2 Joule / 31.2 ft.lbs | 48.9 Joule / 36.1 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 225 | 155 | 160 |
| Air Tube Volume | 515cc (425cc Aluminum | n Bottle + 90cc Pre-Char | mber) |
| Fill Pressure | 250 Bar | | |
| Stock | Bullpup Design, High Quality Aluminium Stock 3-Axis Adjustable Butt Pad with Monopod | | |

NEW Meta Lite in synthetic stock is now available

| Overal Length | 780 mm (23.4") |
|---------------|------------------|
| Barrel Length | 480 mm (18.8") |
| Weight | 3.9 kg (8.6 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.









META



| Model | META | | |
|---|--|---|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 332m/s (1000fps) | 269m/s (880fps) | 243.8m/s (800fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 42.2 Joule / 31.2 ft.lbs | 48.9 Joule / 36.1 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 125 | 85 | 80 |
| Air Tube Volume | 260cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Bullpup Design, High C 3-Axis Adjustable Butt | Quality Aluminium Stock Pad with Monopod | |

NEW Meta Lite in synthetic stock is now available

| Regulator | Standard |
|---------------|------------------|
| Weight | 3.6 kg (7.9 lbs) |
| Barrel Length | 480 mm (18.8") |
| Overal Length | 750 mm (29.5") |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.











Upgraded Hammer Tension Adjustment Wheel & System Pre-Chamber

Upgraded Regulator Adjustment Wheel & New Valve System

Easy Change Air Tube (Switch Without De-Gassing)



| Model | THRONE GEN2 | | |
|---|------------------------|---------------------------|----------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 310m/s (1010fps) | 275m/s (935fps) | 250m/s (830fps) |
| Energy | 26 Joule / 19 ft.lbs | 47.7 Joule / 35.2 ft.lbs | 52.6 Joule / 38.8 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 165 | 110 | 80 |
| Air Tube Volume | 425cc Aluminium (Opti | ional 480cc Carbon Fiber | Air Tank + 18cc Pre-Chambe |
| Fill Pressure | 250 Bar | | |
| Stock | Adjustable Butt Pad Hi | gh Quality Synthetic Stoo | ck and Grip |

| Overal Length | 850 mm (33.5") |
|---------------|-----------------------|
| Barrel Length | 580 mm (22.8") |
| Weight | 3.5 kg (7.7 lbs) |
| Regulator | Externally Adjustable |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.







Throne Gen2 Desert Sand Carbon Bottle



Throne Gen2 Skull Camo



Throne Gen2 61 Camo



Scan code for all options and colors



Throne Gen2 Compact



| Model | THRONE GEN2 COMPA | ACT | |
|---|------------------------|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 281m/s (925fps) | 243m/s (800fps) | 216m/s (745fps) |
| Energy | 21.7 Joule / 16 ft.lbs | 34.9 Joule / 25.8 ft.lbs | 42.4 Joule / 31.3 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 75 | 65 | 55 |
| Air Tube Volume | 300cc Carbon Bottle (1 | 8cc Pre-Chamber) | |
| Fill Pressure | 250 Bar | | |
| Stock | Adjustable Butt Pad Hi | gh Quality Synthetic Sto | ck and Grip |

| Overal Length | 700 mm (27.5") |
|---------------|------------------|
| Barrel Length | 420 mm (16.5") |
| Weight | 3.3 kg (7.3 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.









| Model | RP | |
|---|----------------------|--------------------------|
| Cocking System | SIDE LEVER | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal |
| Maximum Muzzle Velocity | 186m/s (610fps) | 157m/s (515fps) |
| Energy | 9.5 Joule / 7 ft.lbs | 14.5 Joule / 10.7 ft.lbs |
| Magazine Capacity | 9 | 7 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 55 | 40 |
| Air Tube Volume | 50cc Aluminium (Rem | ovable) |
| Fill Pressure | 250 Bar | |
| Stock | Removable High Quali | ty Synthetic Stock |

| Overal Length | 330 mm (13") |
|---------------|----------------------|
| Barrel Length | 200 mm (7.9") |
| Weight | 900 grams (1.98 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.





| Model | RPA | |
|---|--|--------------------------|
| Cocking System | SIDE LEVER | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal |
| Maximum Muzzle Velocity | 186m/s (610fps) | 157m/s (515fps) |
| Energy | 9.5 Joule / 7 ft.lbs | 14.5 Joule / 10.7 ft.lbs |
| Magazine Capacity | 9 | 7 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 55 | 40 |
| Air Tube Volume | 50cc Aluminium (Removable) | |
| Fill Pressure | 250 Bar | |
| Stock | Turkish Walnut / Optional Laminated Grip | |

| Overal Length | 330 mm (13") |
|---------------|----------------------|
| Barrel Length | 200 mm (7.9") |
| Weight | 900 grams (1.98 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



NYX





AR-15 Grip

Scan code for all options and colors





Optional 700cc Carbon Bottle

Number of Shots with 700cc Carbon Bottle at Optimal Velocity 250 Bar - 110 Bar, 4.5mm: 195 Shot, 5.5mm: 165 Shot, 6.35mm 210 Shot

| Model | NYX | | |
|---|--|--------------------------|---------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 308m/s (1000fps) | 274m/s (900fps) | 243m/s (800fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 44.3 Joule / 32.6 ft.lbs | 48.9 Joule / 36.09 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 200 | 130 | 160 |
| Air Tube Volume | 500cc / Optional 700cc Carbon Bottle | | |
| Fill Pressure | 250 Bar | | |
| Stock | Tactical Telescopic Stock Elevation Adjustable Cheek Rest. | | |

| Overal Length | 1050 mm (41.3") |
|---------------|----------------------|
| Barrel Length | 480 mm (18.8") |
| Weight | 4.415 kg (9.813 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.







| Model | ZONE | | |
|---|--------------------------|---------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 304m/s (1000fps) | 270m/s (935fps) | 25m/s (850fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 47.7 Joule / 35.2 ft.lbs | 55.2 Joule / 40.7 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 75 | 65 | 55 |
| Air Tube Volume | 260cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Bullpup Design High Q | uality Synthetic Stock, A | djustable Butt Pad |

| Overal Length | 900 mm (35.4") |
|---------------|-------------------|
| Barrel Length | 580 mm (22.8") |
| Weight | 3.3 kg (7.27 lbs) |
| Regulator | Standard |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

ZONE W





| Model | ZONE W | | |
|---|--------------------------|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 304m/s (1000fps) | 270m/s (935fps) | 25m/s (850fps) |
| Energy | 25.4 Joule / 18.7 ft.lbs | 47.7 Joule / 35.2 ft.lbs | 55.2 Joule / 40.7 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 75 | 65 | 55 |
| Air Tube Volume | 260cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Turkish Walnut | | |

| Overal Length | 900 mm (35.4") | |
|---------------|-------------------|--|
| Barrel Length | 580 mm (22.8") | |
| Weight | 3.3 kg (7.27 lbs) | |
| Regulator | Standard | |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



| Model | APEX | | |
|---|--------------------------|---------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 340m/s (1110fps) | 270m/s (880fps) | 255m/s (830fps) |
| Energy | 31.3 Joule / 23.1 ft.lbs | 42.3 Joule / 31.2 ft.lbs | 53.9 Joule / 39.8 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 112 | 96 | 80 |
| Air Tube Volume | 310cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Bullpup Design High Q | uality Synthetic Stock Ad | djustable Butt Pad |

| Overal Length | 850 mm (33.4") |
|---------------|----------------|
| Barrel Length | 480 mm (18.9") |
| Weight | 3 kg (6.6 lbs) |
| Regulator | Optional |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- *Data may vary on products with optional regulator.
- * Scope is not included.









Adjustable Butt Pad

ACCURA



| Model | ACCURA | | |
|---|---|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 350m/s (1150fps) | 290m/s (950fps) | 260m/s (850fps) |
| Energy | 33.6 Joule / 24.8 ft.lbs | 49.3 Joule / 36.3 ft.lbs | 55.2 Joule / 40.7 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 168 | 144 | 120 |
| Air Tube Volume | 425cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | High Quality Synthetic Adjustable Butt Pad | Stock Turkish Walnut Ac | ljustable Cheek Piece |

| Overal Length | 1010 mm (39.7") |
|---------------|----------------------------|
| Barrel Length | 380 mm (14.9") |
| Weight | Synthetic: 3.5 kg (7.7lbs) |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

ACCURA W





| Model | ACCURA W | | |
|---|--------------------------|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 350m/s (1150fps) | 290m/s (950fps) | 260m/s (850fps) |
| Energy | 33.6 Joule / 24.8 ft.lbs | 49.3 Joule / 36.3 ft.lbs | 55.2 Joule / 40.7 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 168 | 144 | 120 |
| Air Tube Volume | 425cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Turkish Walnut Stock , | Adjustable Cheek Piece | |


& Manual Safety

| Overal Length | 1010 mm (39.7") |
|---------------|----------------------|
| Barrel Length | 380 mm (14.9") |
| Weight | Wood: 3.1kg (6.8lbs) |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



TORMENTA

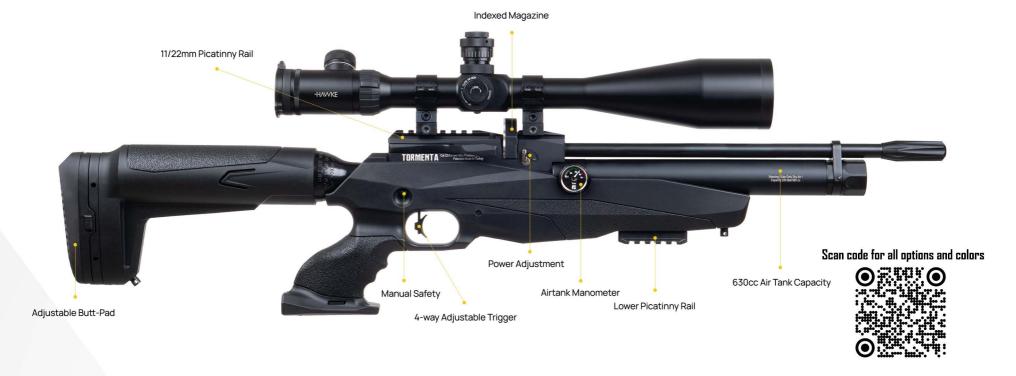

| Model | TORMENTA | | |
|---|--|--------------------------|---------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 332m/s (1090fps) | 270m/s (880fps) | 255m/s (840fps) |
| Energy | 30.2 Joule / 22.3 ft.lbs | 42.3 Joule / 31.2 ft.lbs | 53.9 Joule / 39.76 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 126 | 108 | 90 |
| Air Tube Volume | 380cc (250 cc Rear Bottle + 130 cc Front Cylinder) | | |
| Fill Pressure | 250 Bar | | |
| Stock | High Quality Synthetic | Stock Adjustable Butt Pa | nd |

| Overal Length | 850 mm (33.4") | |
|---------------|-------------------|--|
| Barrel Length | 380 mm (14.9") | |
| Weight | 2.8 kg (6.17 lbs) | |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.

TORMENTA W



Turkish Walnut Stock



Tormenta Color Options



Tormenta Ambush



Tormenta Thunder White



Tormenta Red Fire



Scan code for all options and colors



| Model | DAYSTAR | | | |
|---|--|-------------------------|-----------------------------|--|
| Cocking System | SIDE LEVER | | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal | |
| Maximum Muzzle Velocity | 350m/s (1150fps) | 290m/s (950fps) | 260m/s (850fps) | |
| Energy | 33.6 Joule / 24.8 ft.lbs 49.3 Joule / 36.3 ft. | | bs 55.2 Joule / 40.7 ft.lbs | |
| Magazine Capacity | 14 | 12 | 10 | |
| Number of Shots At Optimal Velocity (250-110 Bar) | 98 | 84 | 70 | |
| Air Tube Volume | 260cc | | | |
| Fill Pressure | 250 Bar | | | |
| Stock | High Quality Synthetic | Stock, Adjustable Cheek | Piece, Adjustable Butt Pad | |

| Overal Length | 1050 mm (41.3") |
|---------------|----------------------------|
| Barrel Length | 580 mm (22.8") |
| Weight | Synthetic: 2.8 kg (6.1lbs) |
| Regulator | Optional |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- *Data may vary on products with optional regulator.
- * Scope is not included.

DAYSTAR W





Scan code for all options and colors



DAYSTAR W Blue Laminated

| Model | DAYSTAR W | | |
|---|--------------------------|---------------------------|---------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 350m/s (1150fps) | 290m/s (950fps) | 260m/s (850fps) |
| Energy | 33.6 Joule / 24.8 ft.lbs | 49.3 Joule / 36.3 ft.lbs | 55.2 Joule / 40.7 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 98 | 84 | 70 |
| Air Tube Volume | 260cc | | |
| Fill Pressure | 250 Bar | | |
| Stock | Turkish Walnut Stock, A | Adjustable Cheek Piece, (| Optional Laminated Stocks |

| Overal Length | 1050 mm (41.3") |
|---------------|--------------------|
| Barrel Length | 580 mm (22.8") |
| Weight | Wood: 3.2kg (7lbs) |
| Regulator | Optional |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- *Data may vary on products with optional regulator.
- * Scope is not included.



LYRA



Rubber Butt Pad



Scan code for all options and colors







Sound Moderators & Fitted Muzzle Cap

| Model | LYRA | | |
|---|--------------------------------|--------------------------|--------------------------|
| Cocking System | SIDE LEVER | | |
| Caliber | 4.5mm / .177cal 5.5mm / .22cal | | 6.35mm / .25cal |
| Maximum Muzzle Velocity | 350m/s (1115fps) | 290m/s (965fps) | 260m/s (850fps) |
| Energy | 31.6 Joule / 23.3 ft.lbs | 50.8 Joule / 37.5 ft.lbs | 55.4 Joule / 40.7 ft.lbs |
| Magazine Capacity | 14 | 12 | 10 |
| Number of Shots At Optimal Velocity (250-110 Bar) | 110 | 75 | 65 |
| Air Tube Volume | 280cc | | |
| Fill Pressure | 200 Bar | | |
| Stock | Turkish Walnut | | |

| Overal Length | 1070 mm (41.3") | | |
|---------------|-------------------|--|--|
| Barrel Length | 580 mm (22.8") | | |
| Weight | 3.45 kg (7.6 lbs) | | |

- * Velocity figures are tested with 8.44 grain 177 cal- 18.13 grain 22 cal and 25.39 grain 25cal JSB pellets
- * Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
- * Scope is not included.



LYRA-K





| Cocking System | | | Side Lever | Fill Pressure | 250 Bar |
|--|-------------------------|-------------------------|-------------------------|---------------|-------------------|
| Caliber | 4.5mm / .177cal | 5.5mm / .22cal | 6.35mm / .25cal | Stock | Turkish Walnut |
| Max Muzzle Velocity (*) | 305m/s (1000fps) | 275m/s (900fps) | 244m/s (800fps) | Overal Length | 880mm (34,6") |
| Energy (*) | 31.6 Joule/ 23.3 ft.lbs | 50.8 Joule/ 37.5 ft.lbs | 55.4 Joule/ 40.7 ft.lbs | Barrel Length | 380mm (14.9") |
| Magazine Capacity | 14 | 12 | 10 | Weight | 2.8 kg (6.1 lbs) |
| Number of Shots At Optimal Velocity (200-100Bar) 100, 70, 60 | | | | | |
| Air Tube Volume | - | | 250cc | | |



Reximex ABS Cases



Reximex Filling Equipments









Reximex Air Rifle Sound Moderators





Accessories



